



Product catalog
CONELOG® PROGRESSIVE-LINE

India
Valid from February 2022

a perfect fit



camlog

Content

System information

The CONELOG® Implant System	2
-----------------------------	---

Surgery

Planning	14
PROGRESSIVE-LINE Implants and instruments	17
PROGRESSIVE-LINE Flex instruments	18
PROGRESSIVE-LINE Instruments	22
PROGRESSIVE-LINE Guide System	26
General surgical instruments	31
Cover screws	34
Healing caps	34

Prosthetics

Impression taking	36
Bite registration	37
Fabrication of the plaster model	37
Temporary restoration	38
Esthomic® Abutments	38
CAD/CAM prosthetics	40
CAM titanium blanks	42
Universal abutments	43
Gold-plastic abutment	43
Logfit® Prosthetic system	44
Ball abutment anchoring system	45
Locator® Anchoring system	46
Double crown restorations	51
Accessories for abutments	51
Prosthetic instruments	52
Instruments for dental technicians	56
Selection abutments	57

Auxiliary information

Indication overview	58
Implant overview	61
Prosthetics overview	62
Screw overview	67
Overview tightening torque	69
Materials	71

Index

Alphabetical	72
Article number	76

Further documentation

Further documentation	82
References	82
Disclaimer	82

The CONELOG® Implant System



The CONELOG® Implant System is based on years of clinical and laboratory experience and is a user-friendly, consistent prosthetically oriented implant system.

All CONELOG® Products are manufactured with the latest state-of-the-art technology. The CONELOG® Implant System is continuously being developed by the company's research and development team in collaboration with clinics, universities and dental technicians and therefore stays abreast of the latest technology.

The Camlog Implant Systems are very well documented scientifically. Studies* support this with respect to a great many parameters including the implant surface, time of implantation and/or implant loading, primary stability, and the connection design. The long-term results of the Promote® Surface are convincing.

The descriptions that follow are not adequate to permit immediate use of the CONELOG® Implant System.

Instruction by a surgeon experienced in using the system is strongly recommended. CONELOG® Products should only be used by dentists, doctors, surgeons and dental technicians who have been trained in using the system. Appropriate courses and training sessions are regularly offered by Camlog.

Methodological errors in treatment can result in loss of the implant and significant loss of peri-implant bone.

Not all products and services from Camlog are available in India.

Packaging units: unless described otherwise, each pack contains one product.

The images in this document are for reference purposes only and may differ from the actual product.

* See "Further documentation" on page 82.

CONELOG® PROGRESSIVE-LINE Implants

The CONELOG® PROGRESSIVE-LINE Implants make it easier to implement modern treatment concepts such as immediate restorations or immediate loading, which require high primary stability [1, 2]*.

The geometry of the implant is consistently designed to develop high initial stability:

- The self-tapping screw implant has a conically shaped apical area that enables pronounced primary stability even in soft bone [1, 2]*.
- Thread extending to the apex for good anchorage in immediate implantations [1, 2]*.
- Crestal thread for improved hold with limited bone height [2]*.
- Parallel-walled area of the implant body for greater flexibility of the vertical position.

CONELOG® PROGRESSIVE-LINE Implants are available with the abrasive-blasted, acid-etched Promote® Surface which extends over the entire implant body up to the acid-etched conical 45° implant shoulder. Depending on the clinical situation, this surface design thus permits epicrestal or slightly subcrestal implant positioning in the sense of a classic bone level implant.

PROGRESSIVE-LINE Implants with screw-mounted insertion post can be used for the guided implantation. All CONELOG® Implants are delivered pre-assembled in sterile packaging on a color-coded insertion post corresponding to the diameter.

CONELOG® PROGRESSIVE-LINE Implants feature the high-precision, conical CONELOG® Implant-abutment connection with integrated Platform Switching. Prosthetic restoration is performed with CONELOG® Abutments.

* See "Further documentation" on page 82.



CONELOG® PROGRESSIVE-LINE
Implant Promote® plus




CONELOG® Implant-Abutment connection

The geometry of the CONELOG® Implant-Abutment connection enables integrated Platform Switching and provides excellent tactile feedback when inserting the abutments. Indexing via the three grooves/cams allows the cams to slide noticeably into the grooves of the implant and thus into the final position when the abutment is rotated slightly. Simple, easy and safe orientation in the longitudinal axis of the implant is thus ensured. The precise conical connection minimizes micro-movements and demonstrates superior stability compared to other conical connections [3, 4]*.

Advantages and benefits of the CONELOG® Connection


- Simple, fast and precise abutment positioning with clearly noticeable tactile feedback
- Precise, conical implant-abutment connection with superior stability compared to other conical connections
- Integrated Platform Switching [3, 4]*

For optimal positioning of the abutments, the implant should be aligned in the bone so that one of the three grooves points in vestibular direction. With the CONELOG® Implants, the insertion tools include markings that correspond to the three grooves of the implant inner configuration.

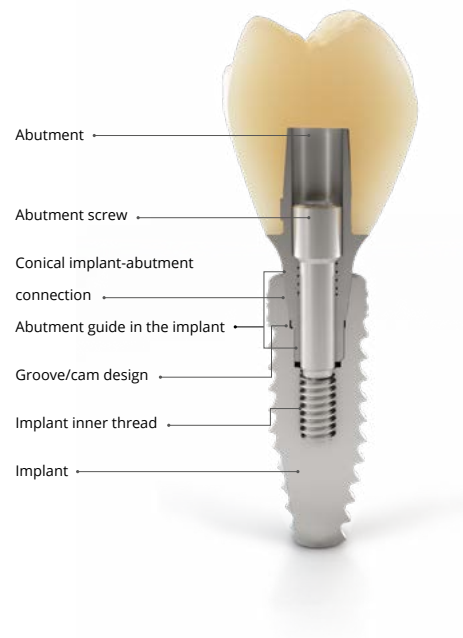

Promote® Surface

CONELOG® Implants are available with the abrasive-blasted, acid-etched Promote® Surface. The surface is based on current scientific knowledge and supports rapid osseointegration. Scientific results from studies with cell cultures, osteohistology and in pull-out trials illustrate this impressively.

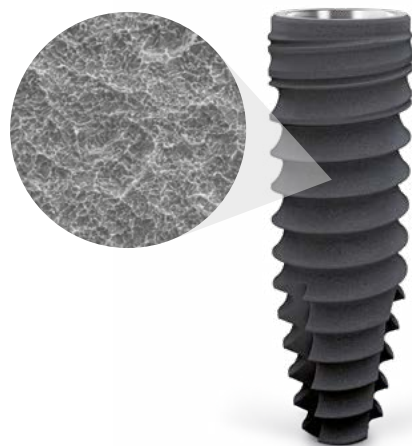

Production precision

The inner and outer geometry of the CONELOG® Implants and abutments are rotary machined for the most part. The tolerances can therefore be kept very low. The result is excellent part precision without impacting the material structure. The CONELOG® Implant-abutment connection thus ensures a very precise, stable and rotation-locked connection to the prosthetic components.

* See "Further documentation" on page 82.

CONELOG® Prosthetic components

The CONELOG® PROGRESSIVE-LINE Implants can be provided with a wide range of flexible, anatomically adapted prosthetic components. CONELOG® Abutments are color-coded according to the implant diameters.

Effect of the Platform Switching design

The CONELOG® Implant system offers integrated Platform Switching as the implant shoulder is not covered by the healing caps and abutments. Platform Switching option is used to support the hard and soft tissue in the peri-implant esthetic region. The distance between the implant-abutment interface and the alveolar crest is increased and thereby reduces the effect of inflammatory cell infiltration with concomitant bone resorption.



CONELOG® Healing caps

CONELOG® Healing caps sit on the machined implant shoulder, but do not cover it completely. As a result, the soft tissue over the shoulder can be adapted. The conical surfaces do not come into contact.

The healing caps are used according to indication for single and two-stage procedures. The healing caps are available in three geometries (cylindrical, wide body and bottleneck) and are screwed directly into the implant.

CONELOG® Impression taking

Impression-taking of the CONELOG® Implants is possible with impression posts, open or closed tray. All impression-taking components are color-coded based on the implant diameter. High-precision components ensure correct transfer of the intraoral situation.

The CONELOG® Impression posts do not lock into the cone of the implant, but lie on the implant shoulder. Thus, a vertical offset is prevented when taking the impression. The antirotational mechanism is ensured by the CONELOG® Groove/cam geometry.





CONELOG® Temporary abutments

CONELOG® Temporary abutments made of titanium alloy are available for temporary restorations in crown and bridge versions. The abutments can be used in immediate implantations or after exposing the gingiva.

CONELOG® Titanium bases CAD/CAM

CONELOG® Titanium bases CAD/CAM are acting as a bonding basis for customized, implant-supported dental restorations made of suitable materials. Reconstructions are fabricated with the aid of CAD/CAM techniques. CONELOG® Titanium bases CAD/CAM are available in crown and bridge versions in the gingival heights 0.8 and 2.0 mm.




CONELOG® Esthomic® Abutments

Anatomically preformed abutments allow for optimal stump design. The CONELOG® Esthomic® Abutments are available both straight and angled with various gingival heights and with an oval anatomically pre-shaped shoulder profile. The angled Esthomic® Abutments are available in A and B versions differentiated by a cam offset of 60°. This results in six prosthetic-oriented rotating positions and allows perfect prosthetic alignment of the axes.




CONELOG® Esthomic® Abutment cam alignment

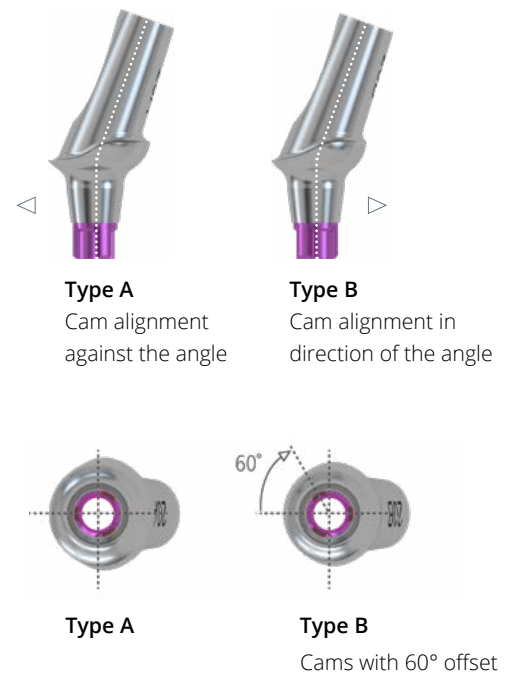



CONELOG® Ball abutments

Ball abutments are available for the CONELOG® Implant System. These differ from the abutments in the apical region through different connection designs. Ball abutments are manufactured as single pieces with a thread in the apical region which engages with the inner thread of the CONELOG® Implant. These abutments are screwed into the CONELOG® Implant using the corresponding insertion tools.

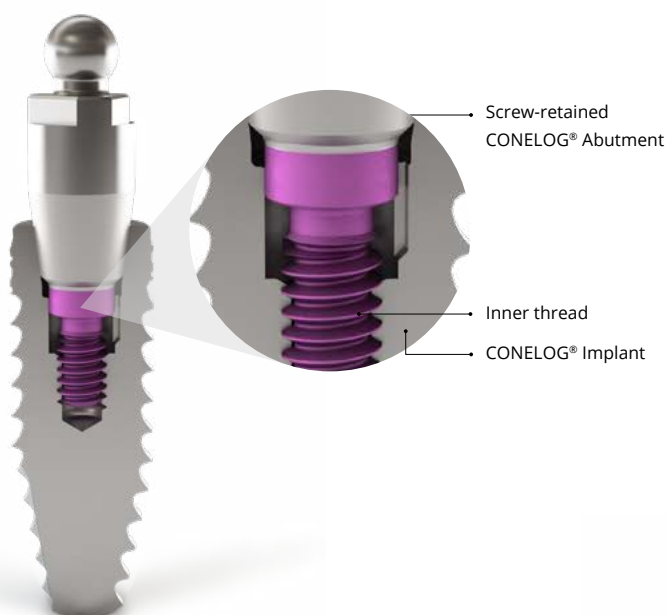

Example: CONELOG® Ball abutment (Ø 4.3 mm)
in a CONELOG® SCREW-LINE Implant

CONELOG® Disconnecter for CONELOG® Abutments

A special CONELOG® Disconnecter is available for the easy removal of CONELOG® Abutments from CONELOG® Implants or lab analogs. First the CONELOG® Abutment screw/ or lab screw is removed and the disconnecter is screwed into the screw canal until the abutment releases from the internal cone of the CONELOG® Implant or lab implant.



Multi-unit abutments for CONELOG®

The Multi-unit abutments for CONELOG® are designed to restore edentulous and partially edentulous arches. Available in multiple gingiva heights and angulations to support treatment in a wide variety of patients. Each abutment shares the same restorative platform, simplifying the restorative process and reducing the number of components required.



CONELOG® connection benefits

- Long conus for reduced micromovements [3]*
- Superior positional stability in comparison to other conical systems [3, 4]*
- Easy positioning with tactile feedback
- Integrated platform switching
- "Vertical fit feature" designed to minimize vertical discrepancy during workflow


























Multi-unit abutments for CONELOG®: manufactured by BioHorizons (legal manufacturer)

* See „Further documentation“ on page 82.







Explanation of symbols

	CE-label
	CE-label with notified body number
	Consult instructions for use
	Caution, observe the warning notices
	Medical device
	Article number
	Lot number
	Serial number
	Sterilized using irradiation
	Single sterile barrier system with protective packaging outside
	Single sterile barrier
	Non-sterile
	Date of manufacture
	Use-by date
	Do not resterilize
	Do not reuse
	Do not use if package is damaged
	Keep away from sunlight
	Temperature limit
	Manufacturer
	MR-Conditional
	Contains hazardous substances
	Caution: US Federal law restricts this device to sale by or on the order of a dentist or physician.

Explanation of abbreviations

\varnothing	Diameter
A \varnothing	Apical diameter
G \varnothing	Gingival diameter
PP \varnothing	Prosthetic platform diameter
L	Length
GH	Gingival height
PEEK	Poly ether ether ketone
POM	Polyoxymethylene
PPSU	Polyphenylsulfone

Color-coding of the surgical and prosthetical CONELOG® Products

			
3.3 mm	3.8 mm	4.3 mm	5.0 mm

General safety instructions and warnings

The descriptions in this product catalog are not sufficient to allow immediate use of the CONELOG® Implant System. Instruction by a surgeon experienced in using the CONELOG® Implant System is strongly recommended.

Packaging PROGRESSIVE-LINE Implants

Secondary packaging

Sealed, folding box with color-coded product label

Inner Implant packaging (primary packaging)

Sealed, color-coded



Example of product label for outer Implant packaging











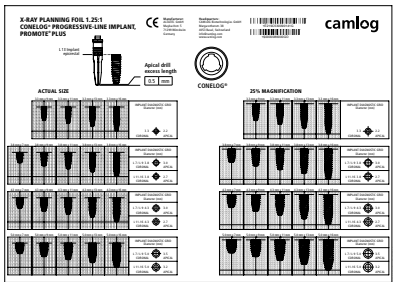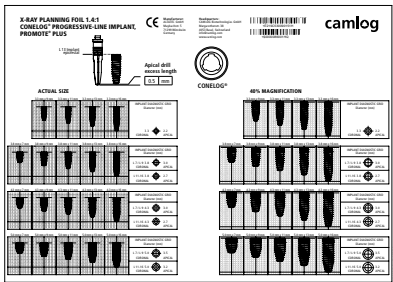

Planning

X-Ray Planning foils and X-Ray Transfer pictures

	Article	Art. No.	Ø
	<p>X-Ray Planning foil 1.25:1 CONELOG® PROGRESSIVE-LINE Implants Magnification 25%</p>	C5300.9014	-
	<p>X-Ray Planning foil 1.4:1 CONELOG® PROGRESSIVE-LINE Implants Magnification 40%</p>	C5300.9015	-

CT-Planning


for 3-D X-Ray Planning and drilling template

	Article	Art. No.	L
	CT-tube for drill Ø 2.0 mm*, corrugated tubing pack of 10 internal diameter 2.1 mm external diameter 2.5 mm Material Titanium alloy	A2002.2000	4.0 mm 10.0 mm
	CT-tube for drill Ø 2.2 mm, corrugated tubing pack of 10 internal diameter 2.3 mm external diameter 2.7 mm Material Titanium alloy	A2222.2200	4.0 mm 10.0 mm
	Drill for CT-tube (for A2002.2000) Ø 2.6 mm Material Stainless steel	A2050.2600	-
	Drill for CT-tube (for A2222.2200) Ø 2.8 mm Material Stainless steel	A2050.2800	-




PROGRESSIVE-LINE

Implants with snap-in insertion post

	Article	Art. No.	Ø	L	A Ø
	CONELOG® PROGRESSIVE-LINE Implant, Promote® plus incl. snap-in insertion post and cover screw, sterile Material Titanium Grade 4 US Pat. No. 9,545,293	C1086.3309	3.3 mm	9 mm	2.2 mm
		C1086.3311		11 mm	
		C1086.3313		13 mm	
		C1086.3316		16 mm	
		C1086.3807	3.8 mm	7 mm	3.0 mm
		C1086.3809		9 mm	
		C1086.3811		11 mm	2.7 mm
		C1086.3813		13 mm	
		C1086.3816		16 mm	
		C1086.4307	4.3 mm	7 mm	3.0 mm
		C1086.4309		9 mm	
		C1086.4311		11 mm	2.7 mm
		C1086.4313		13 mm	
		C1086.4316		16 mm	
		C1086.5007	5.0 mm	7 mm	3.5 mm
		C1086.5009		9 mm	
		C1086.5011		11 mm	3.2 mm
		C1086.5013		13 mm	
		C1086.5016		16 mm	


Surgery

Implants with screw-mounted insertion post

	Article	Art. No.	Ø	L	A Ø
	CONELOG® PROGRESSIVE-LINE Implant, Promote® plus incl. screw-mounted insertion post and cover screw, sterile Material Titanium Grade 4 US Pat. No. 9,545,293	C1085.3309	3.3 mm	9 mm	2.2 mm
		C1085.3311		11 mm	
		C1085.3313		13 mm	
		C1085.3316		16 mm	
		C1085.3807	3.8 mm	7 mm	3.0 mm
		C1085.3809		9 mm	
		C1085.3811		11 mm	2.7 mm
		C1085.3813		13 mm	
		C1085.3816		16 mm	
		C1085.4307	4.3 mm	7 mm	3.0 mm
		C1085.4309		9 mm	
		C1085.4311		11 mm	2.7 mm
		C1085.4313		13 mm	
		C1085.4316		16 mm	
		C1085.5007	5.0 mm	7 mm	3.5 mm
		C1085.5009		9 mm	
		C1085.5011		11 mm	3.2 mm
		C1085.5013		13 mm	
		C1085.5016		16 mm	

PROGRESSIVE-LINE Flex


Surgery set CAMLOG®/CONELOG®

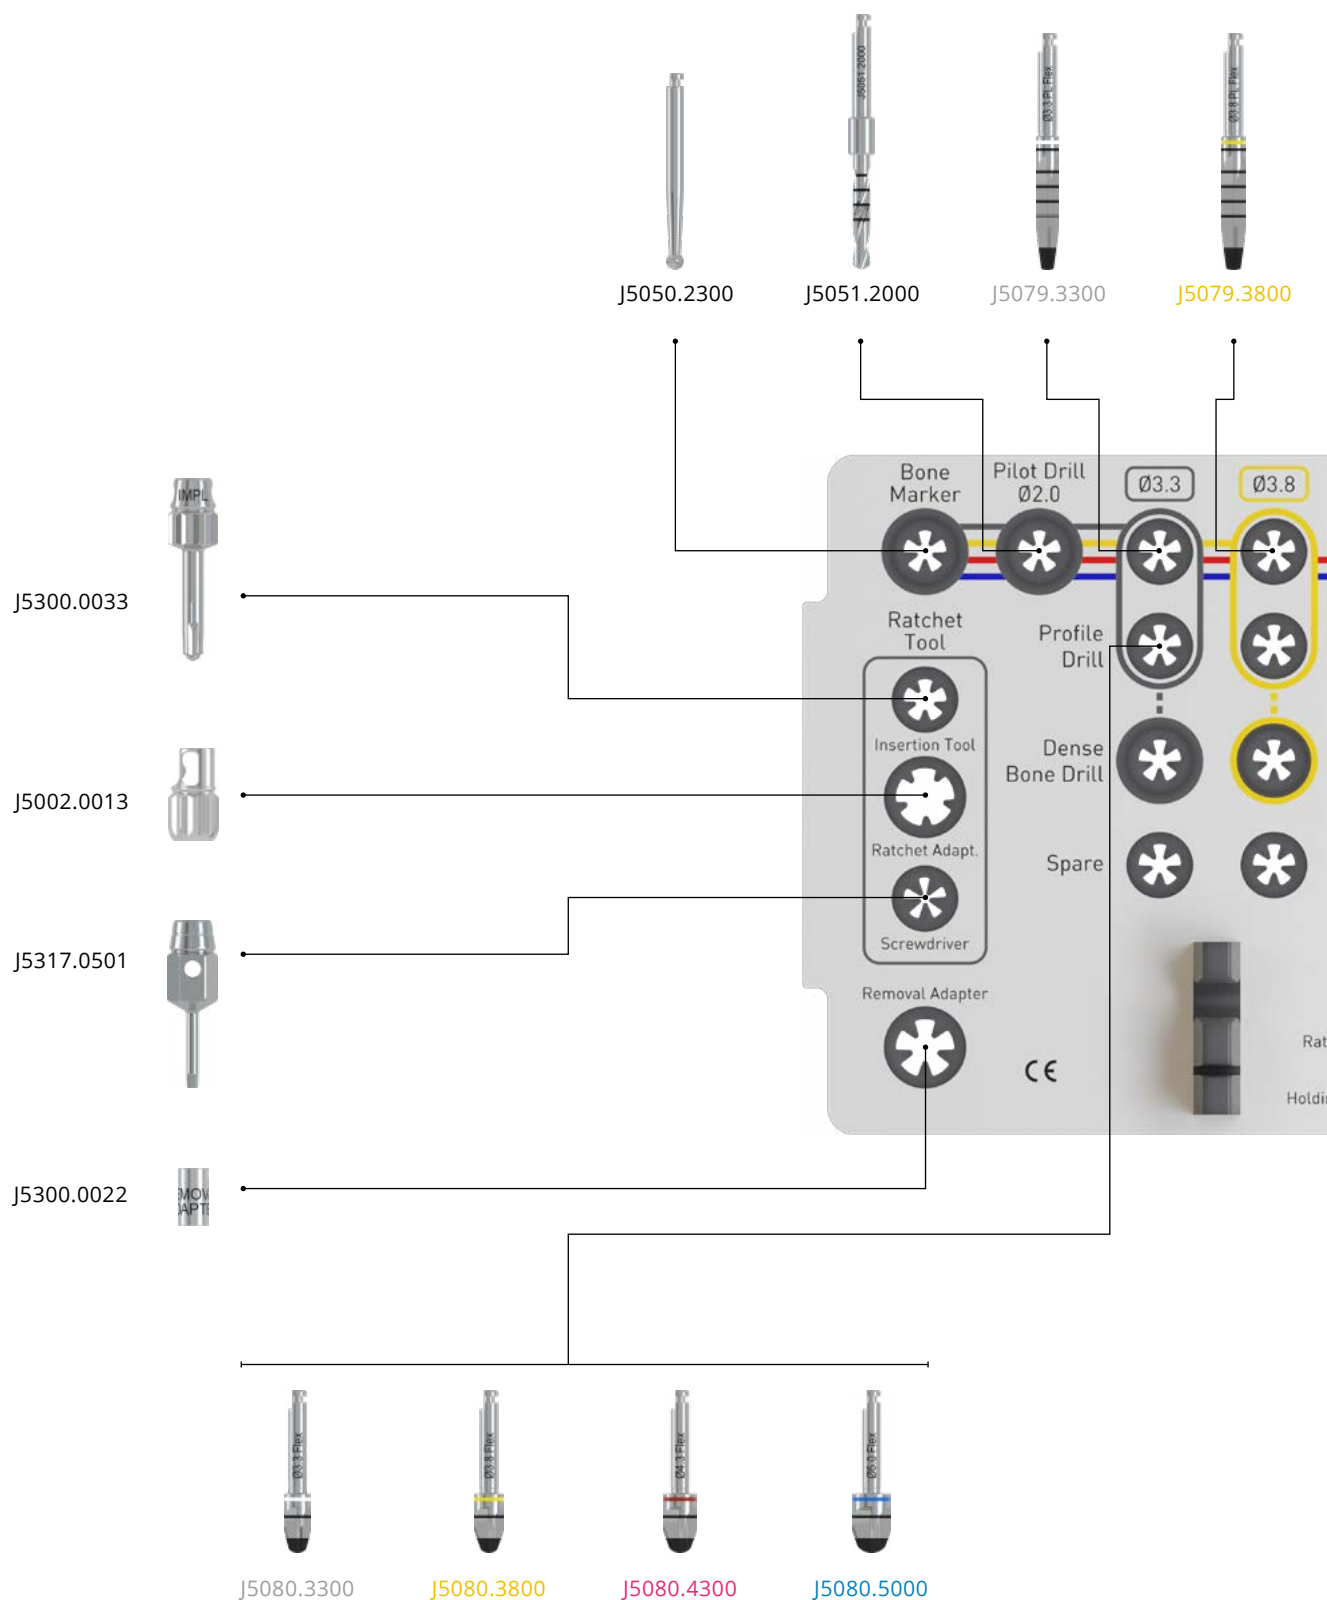

* Optional articles, can be purchased separately.



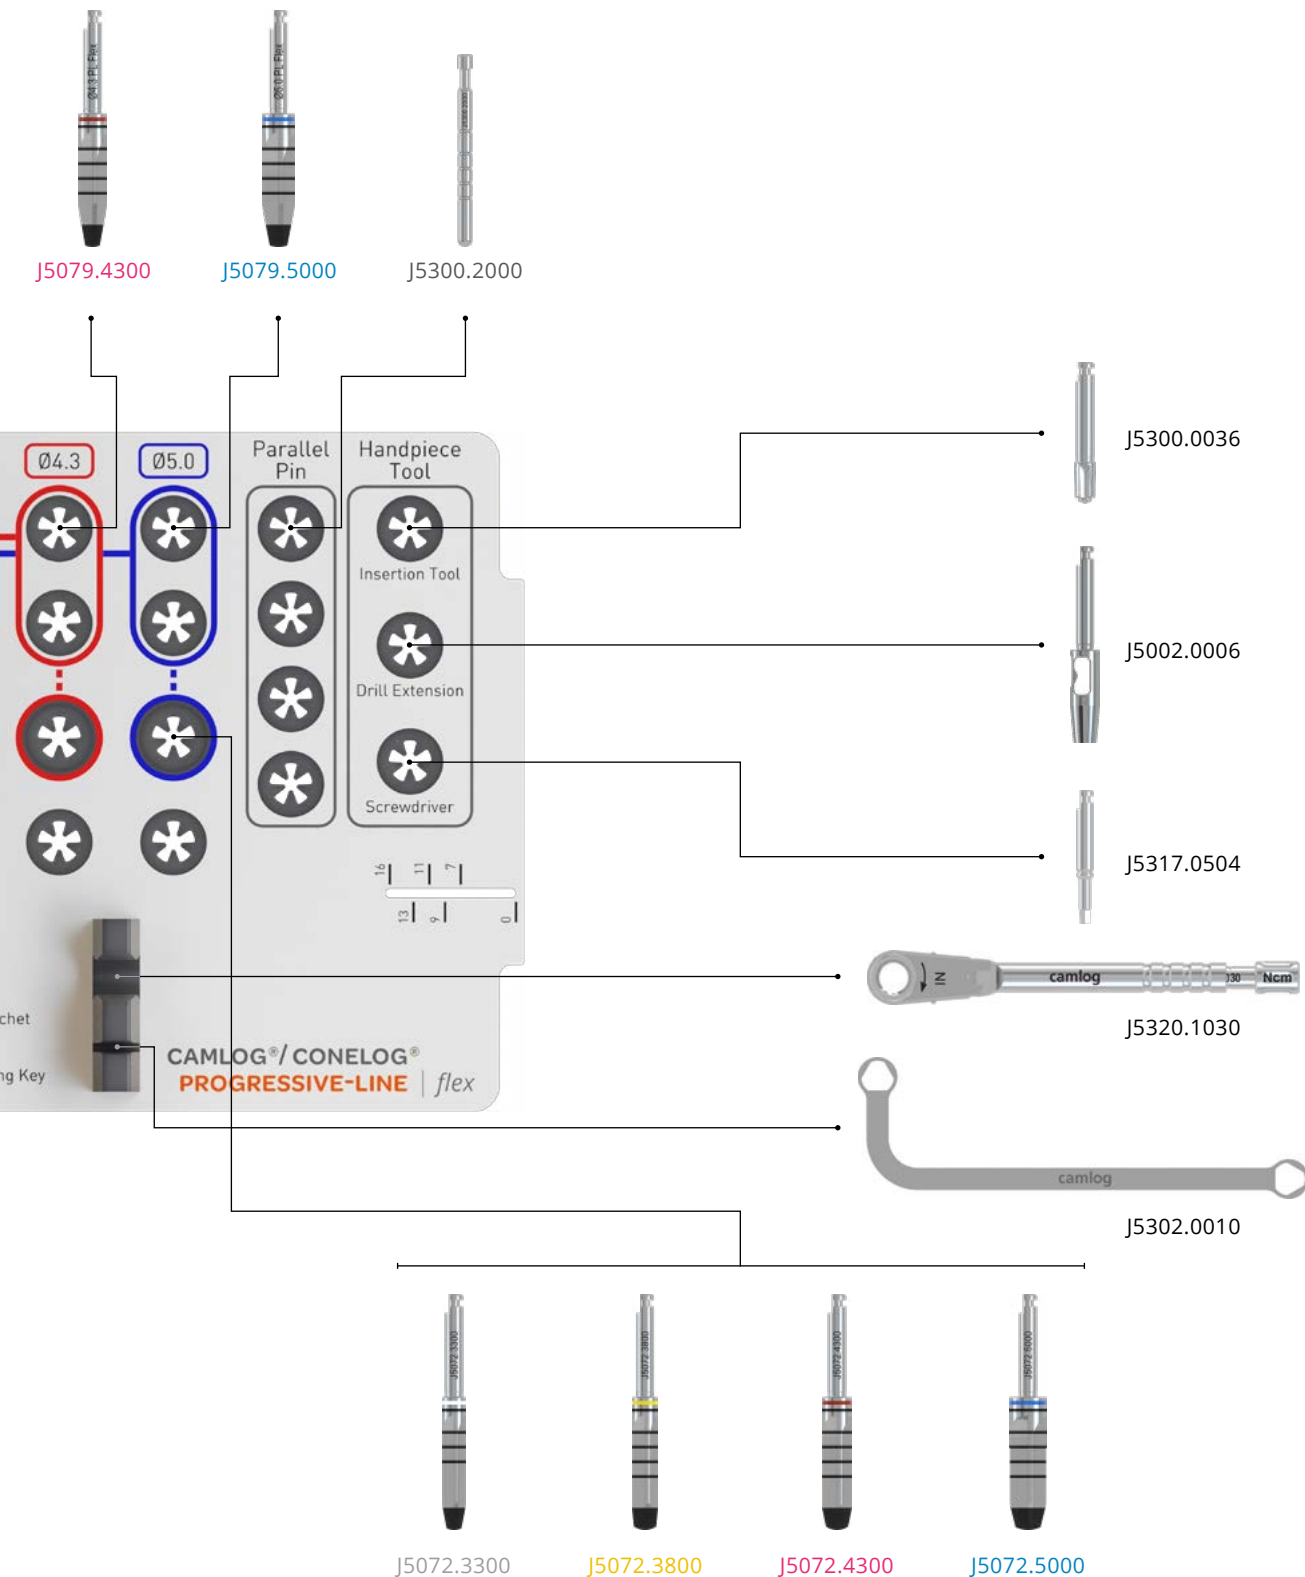

The drills are arranged and sorted in the set according to the treatment sequence. Color lines indicate the exact drilling sequence.



PROGRESSIVE-LINE Flex


Surgery set

	Article	Art. No.
	Surgery set CAMLOG®/CONELOG® PROGRESSIVE-LINE Flex contains all necessary surgical instruments sorted by color code, incl. torque wrench and holding key for insertion post	J5300.0071
	Surgery tray CAMLOG®/CONELOG® PROGRESSIVE-LINE Flex without content	J5300.8920

Surgical instruments


	Article	Art. No.	Ø	L
	Drill PROGRESSIVE-LINE Flex resterilizable Material Stainless steel	J5079.3300	3.3 mm	-
		J5079.3800	3.8 mm	
		J5079.4300	4.3 mm	
		J5079.5000	5.0 mm	
	Profile drill PROGRESSIVE-LINE Flex resterilizable Material Stainless steel	J5080.3300	3.3 mm	-
		J5080.3800	3.8 mm	
		J5080.4300	4.3 mm	
		J5080.5000	5.0 mm	
	Dense Bone Drill PROGRESSIVE-LINE Flex resterilizable Material Stainless steel	J5072.3300	3.3 mm	-
		J5072.3800	3.8 mm	
		J5072.4300	4.3 mm	
		J5072.5000	5.0 mm	
	Tap PROGRESSIVE-LINE Flex resterilizable Material Stainless steel	J5071.3300	3.3 mm	-
		J5071.3800	3.8 mm	
		J5071.4300	4.3 mm	
		J5071.5000	5.0 mm	

Surgical instruments

	Article	Art. No.	Ø	L
	Paralleling pin PROGRESSIVE-LINE with depth marks (for pilot drilling Ø 2.0 mm) Material Titanium alloy	J5300.2000	-	-
	Driver, short for screw implants, with ISO-shaft for angled hand piece (without hexagon at the shaft) Material Stainless steel	J5300.0036	-	19.1 mm
	Driver, long for screw implants, manual/wrench Material Stainless steel	J5300.0033	-	24.8 mm
	Screwdriver hex, short, manual/wrench Material Stainless steel	J5317.0501	-	22.5 mm
	Drill extension ISO shaft (not for instruments with internal irrigation) Material Stainless steel	J5002.0006	-	26.5 mm
	Screwdriver hex, short, ISO shaft Material Stainless steel	J5317.0504	-	18.0 mm
	Removal adapter for CONELOG Material Stainless steel	J5300.0022	-	-
	Wrench adapter Material Stainless steel	J5003.0013	-	11 mm
	Torque wrench with continuous torque adjustment until maximal 30 Ncm Material Stainless steel	J5320.1030	-	-



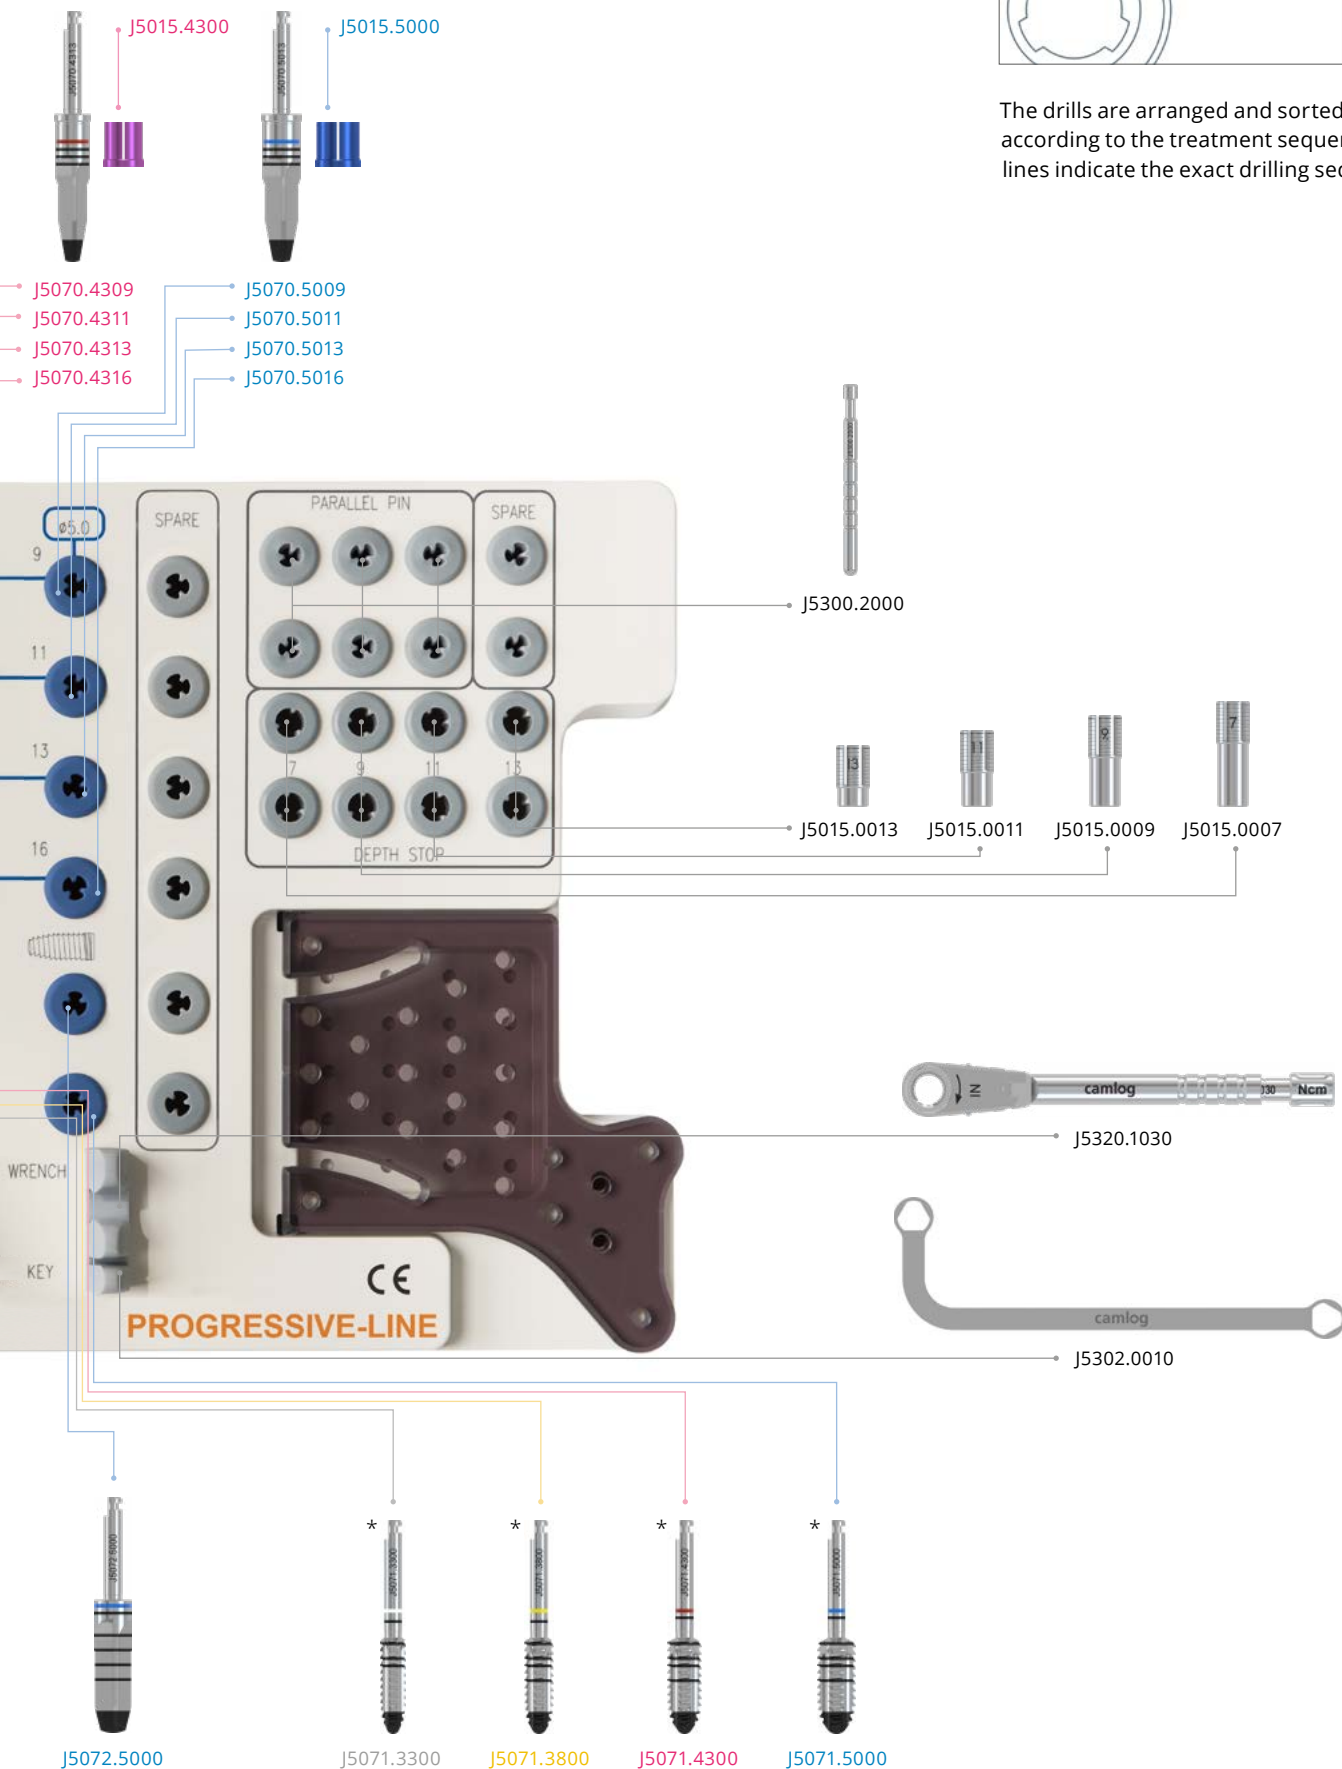

The drills are arranged and sorted in the set according to the treatment sequence. Color lines indicate the exact drilling sequence.










PROGRESSIVE-LINE

Surgery set

	Article	Art. No.
 <p>The image shows the CAMLOG®/CONELOG® PROGRESSIVE-LINE Surgery set. It is a white plastic tray containing various surgical instruments. On the left, there are several small components labeled 'RETRACTOR', 'LATCH', 'EXTENSION', 'WATCHDOG', 'RETRACTOR', and 'ADAPTER'. In the center, there are several rows of colored pins (yellow, red, blue) and a central assembly with a 'HOLDING KEY' and 'TAP'. On the right, there are more pins and a 'HOLDING KEY'. The bottom of the tray has the text 'CAMLOG® / CONELOG® PROGRESSIVE-LINE' and a 'CE' mark.</p>	<p>Surgery set CAMLOG®/CONELOG® PROGRESSIVE-LINE contains all necessary surgical instruments sorted by color code, incl. torque wrench and holding key for insertion post (taps are not included)</p>	J5300.0065
 <p>The image shows the CAMLOG®/CONELOG® PROGRESSIVE-LINE Surgery tray. It is a white plastic tray containing various surgical instruments. On the left, there are several small components labeled 'RETRACTOR', 'LATCH', 'EXTENSION', 'WATCHDOG', 'RETRACTOR', and 'ADAPTER'. In the center, there are several rows of colored pins (yellow, red, blue) and a central assembly with a 'HOLDING KEY' and 'TAP'. On the right, there are more pins and a 'HOLDING KEY'. The bottom of the tray has the text 'CAMLOG® / CONELOG® PROGRESSIVE-LINE' and a 'CE' mark.</p>	<p>Surgery tray CAMLOG®/CONELOG® PROGRESSIVE-LINE without content</p>	J5300.8917


Surgical instruments

	Article	Art. No.	Ø	L
	Round bur resterilizable Material Stainless steel	J5050.2300	2.3 mm	
	Form drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5070.3309	3.3 mm	9 mm
		J5070.3311		11 mm
		J5070.3313		13 mm
		J5070.3316		16 mm
		J5070.3807	3.8 mm	7 mm
		J5070.3809		9 mm
		J5070.3811		11 mm
		J5070.3813		13 mm
		J5070.3816		16 mm
		J5070.4307	4.3 mm	7 mm
		J5070.4309		9 mm
		J5070.4311		11 mm
		J5070.4313		13 mm
		J5070.4316		16 mm
		J5070.5007	5.0 mm	7 mm
		J5070.5009		9 mm
		J5070.5011		11 mm
		J5070.5013		13 mm
		J5070.5016		16 mm
	Depth stop for form drills PROGRESSIVE-LINE and SCREW-LINE resterilizable Material Titanium alloy	J5015.3300	3.3 mm	-
		J5015.3800	3.8 mm	
		J5015.4300	4.3 mm	
		J5015.5000	5.0 mm	
	Dense bone drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5072.3300	3.3 mm	-
		J5072.3800	3.8 mm	
		J5072.4300	4.3 mm	
		J5072.5000	5.0 mm	
	Tap PROGRESSIVE-LINE resterilizable Material Stainless steel	J5071.3300	3.3 mm	-
		J5071.3800	3.8 mm	
		J5071.4300	4.3 mm	
		J5071.5000	5.0 mm	
	Removal adapter for CAMLOG® and CONELOG® suitable for all implant diameters Material Stainless steel	J5300.0022*	3.3 mm	6.2 mm
			3.8 mm	
			4.3 mm	
			5.0 mm	
	Paralleling pin PROGRESSIVE-LINE with depth marks (for pilot drilling Ø 2.0 mm) Material Titanium alloy	J5300.2000	-	-

* only for use with PROGRESSIVE-LINE Implants with snap-in insertion post.



PROGRESSIVE-LINE

Guide System Surgery set CAMLOG®/CONELOG®

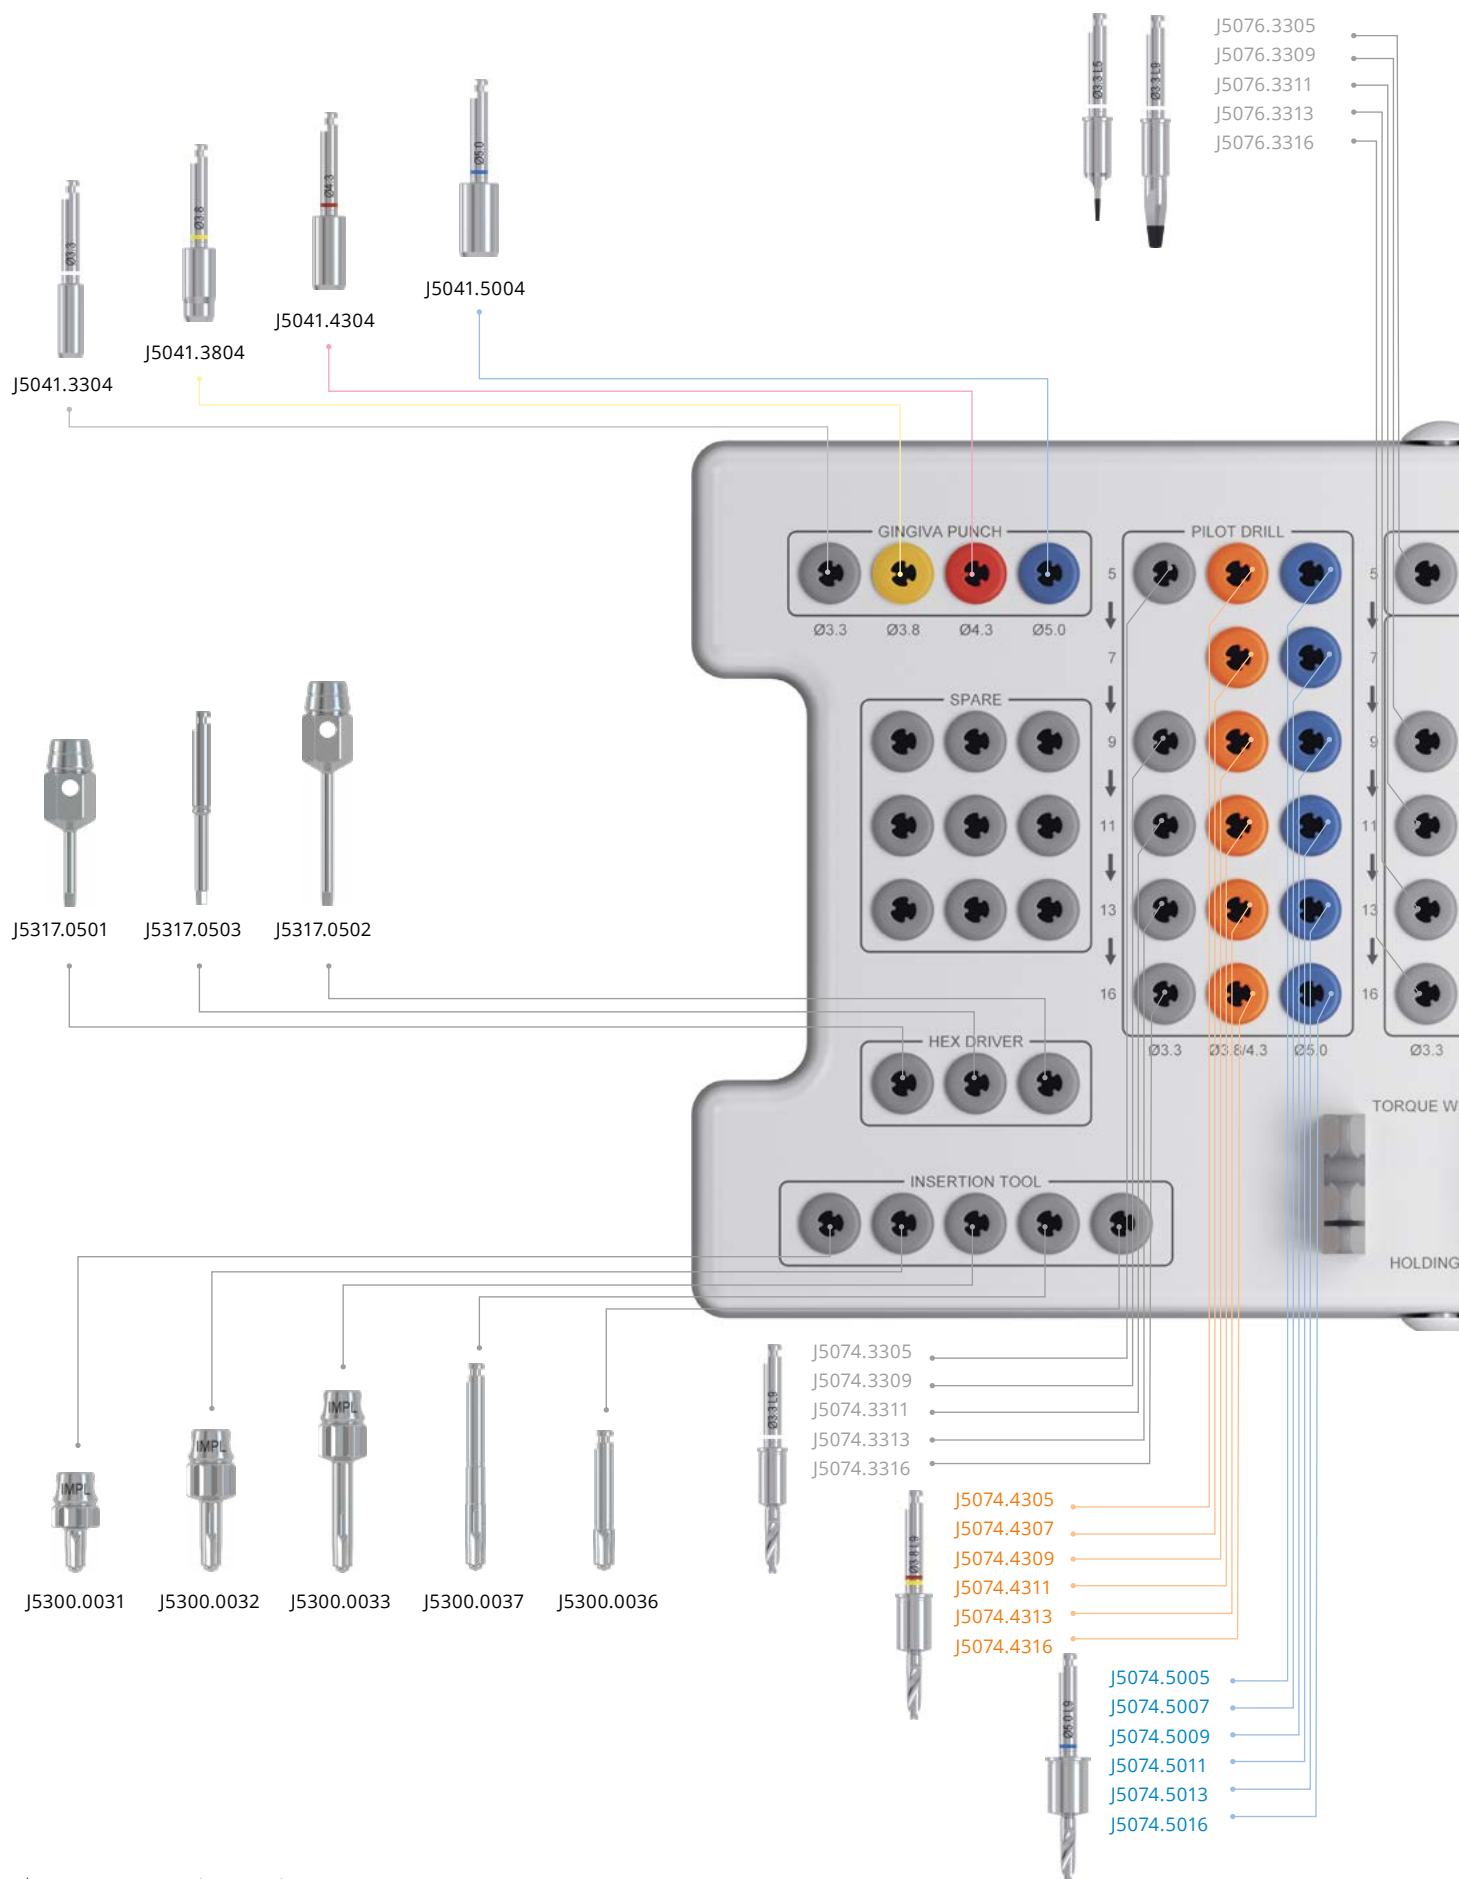



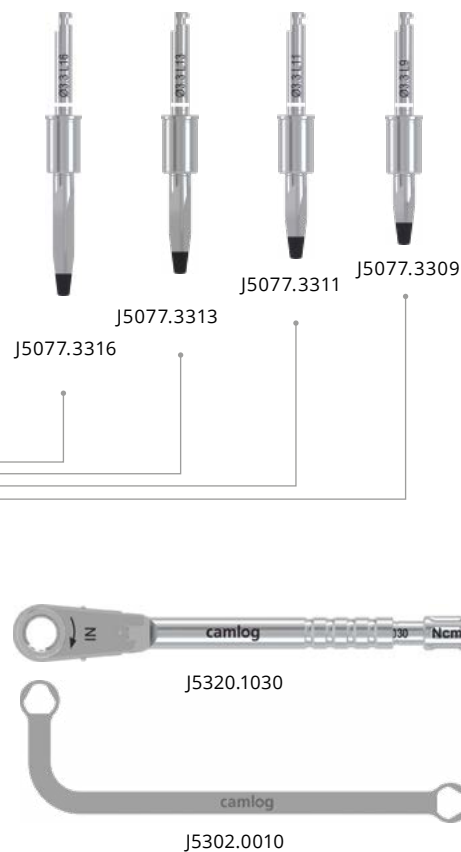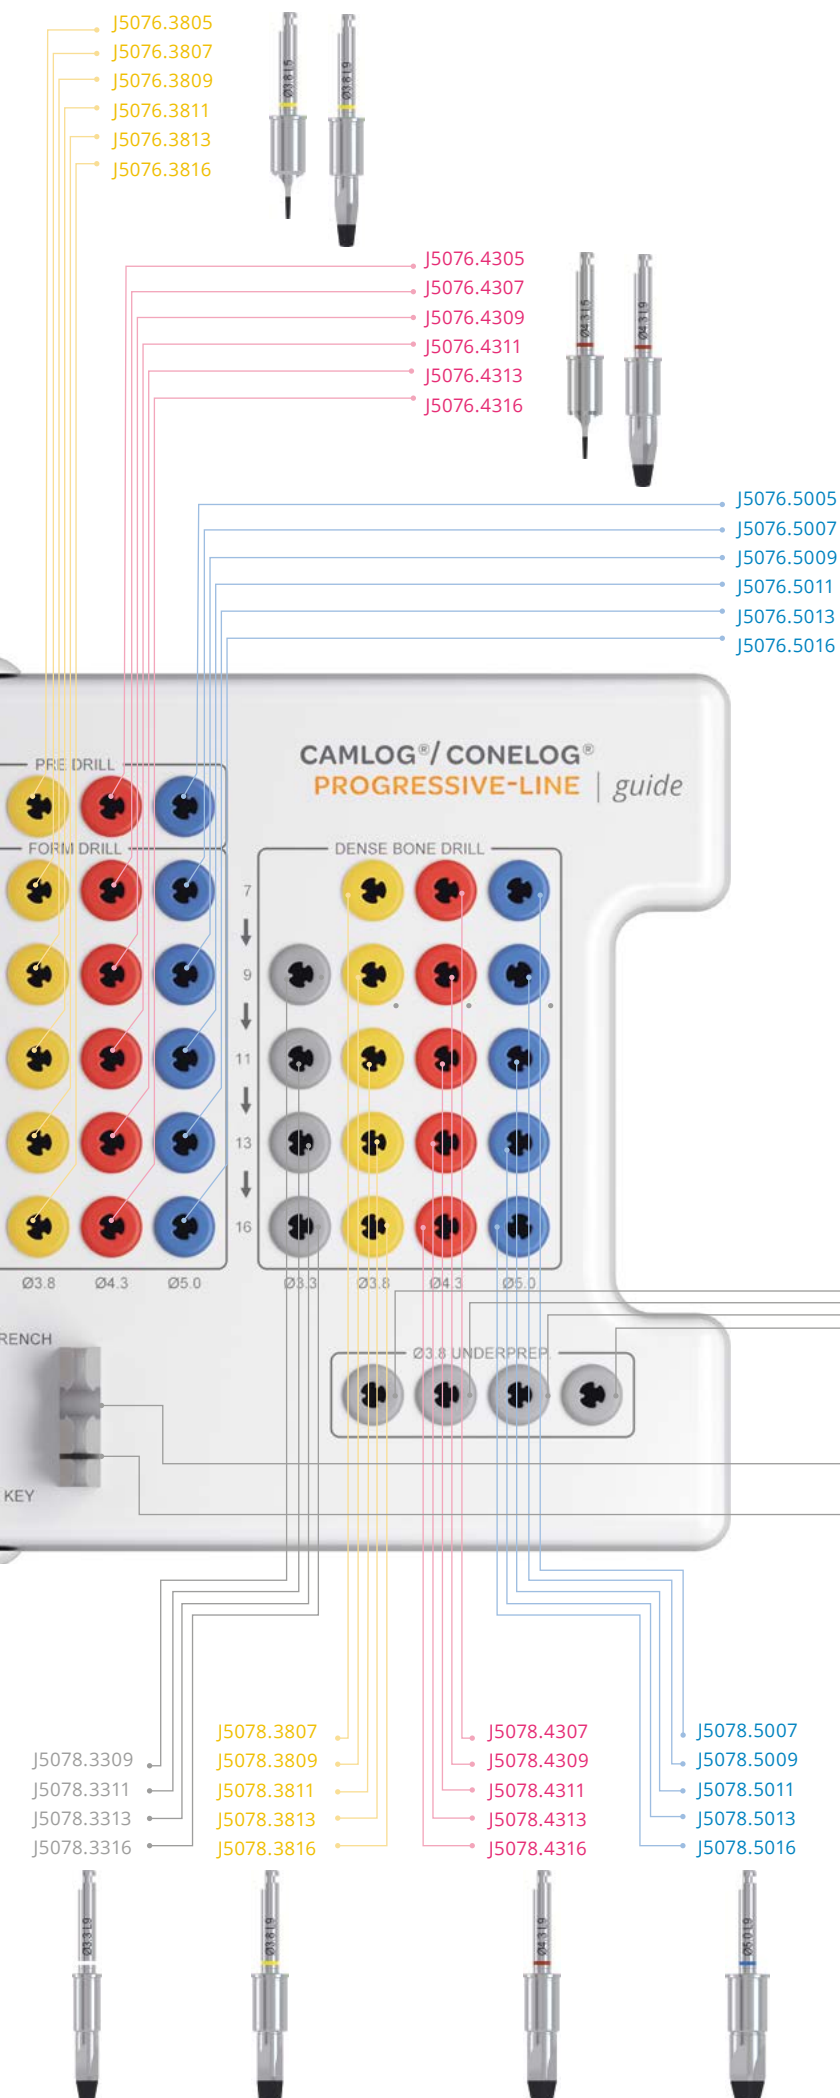


The drills are arranged and sorted in the set according to the treatment sequence. Color lines indicate the exact drilling sequence.



PROGRESSIVE-LINE





Guide System

	Article	Art. No.
	Guide System surgery tray CAMLOG®/CONELOG® PROGRESSIVE-LINE without content	J5300.8919

	Article	Art. No.	Ø	L
	Guide System gingiva punch PROGRESSIVE-LINE resterilizable Material Stainless steel	J5041.3304	3.3 mm	-
		J5041.3804	3.8 mm	
		J5041.4304	4.3 mm	
		J5041.5004*	5.0 mm	
	Guide System pilot drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5074.3305	3.3 mm	5 mm
		J5074.3309		9 mm
		J5074.3311		11 mm
		J5074.3313		13 mm
		J5074.3316		16 mm
		J5074.4305	3.8 mm	5 mm
		J5074.4307		7 mm
		J5074.4309		9 mm
		J5074.4311		11 mm
		J5074.4313		13 mm
		J5074.4316		16 mm
		J5074.5005	5.0 mm	5 mm
		J5074.5007		7 mm
		J5074.5009		9 mm
		J5074.5011		11 mm
		J5074.5013		13 mm
		J5074.5016		16 mm






Notes

Only CONELOG® PROGRESSIVE-LINE Implants with Art. No. C1085.xxxx with screw-mounted insertion post can be used with the PROGRESSIVE-LINE Guide System.

	Article	Art. No.	Ø	L
	Guide System pre-drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5076.3305	3.3 mm	5 mm
		J5076.3805	3.8 mm	
		J5076.4305	4.3 mm	
		J5076.5005*	5.0 mm	
	Guide System form drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5076.3309	3.3 mm	9 mm
		J5076.3311		11 mm
		J5076.3313		13 mm
		J5076.3316		16 mm
		J5076.3807	3.8 mm	7 mm
		J5076.3809		9 mm
		J5076.3811		11 mm
		J5076.3813		13 mm
		J5076.3816		16 mm
		J5076.4307	4.3 mm	7 mm
		J5076.4309		9 mm
		J5076.4311		11 mm
		J5076.4313		13 mm
		J5076.4316		16 mm
		J5076.5007	5.0 mm	7 mm
		J5076.5009		9 mm
		J5076.5011		11 mm
		J5076.5013		13 mm
		J5076.5016		16 mm
	Guide System dense bone drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5078.3309	3.3 mm	9 mm
		J5078.3311		11 mm
		J5078.3313		13 mm
		J5078.3316		16 mm
		J5078.3807	3.8 mm	7 mm
		J5078.3809		9 mm
		J5078.3811		11 mm
		J5078.3813		13 mm
		J5078.3816		16 mm
		J5078.4307	4.3 mm	7 mm
		J5078.4309		9 mm
		J5078.4311		11 mm
		J5078.4313		13 mm
		J5078.4316		16 mm
		J5078.5007	5.0 mm	7 mm
		J5078.5009		9 mm
		J5078.5011		11 mm
		J5078.5013		13 mm
		J5078.5016		16 mm
	Guide System form drill for Ø 3.8 mm under preparation PROGRESSIVE-LINE resterilizable Material Stainless steel	J5077.3309	3.3 mm	9 mm
		J5077.3311		11 mm
		J5077.3313		13 mm
		J5077.3316		16 mm

PROGRESSIVE-LINE

Guide System








	Article	Art. No.	Ø	L
	Guide System template drill PROGRESSIVE-LINE for Guide System guiding sleeve Material Stainless steel	J3753.3300	3.3 mm	-
		J3753.4300	3.8 mm 4.3 mm	
		J3753.5000	5.0 mm	
	Guide System guiding sleeve PROGRESSIVE-LINE* (2 units) Material Titanium alloy	J3754.3301	3.3 mm	-
		J3754.3801	3.8 mm	
		J3754.4301	4.3 mm	
		J3754.5001	5.0 mm	
	Guide System setting tool PROGRESSIVE-LINE for Guide System guiding sleeve Material Stainless steel	J3717.3300	3.3 mm	-
		J3717.4300	3.8 mm 4.3 mm	
		J3717.5000	5.0 mm	
	Guide System check-up pin PROGRESSIVE-LINE for Guide System guiding sleeve Material Stainless steel	J5301.3310	3.3 mm	-
		J5301.4310	3.8 mm 4.3 mm	
		J5301.5010	5.0 mm	
	Guide System CONELOG® Insertion post, screw-mounted for CONELOG® Lab implant/implant analog, incl. fixing screw (2 units) Material Titanium alloy	C2026.3303	3.3 mm	-
		C2026.3803	3.8 mm	
		C2026.4303	4.3 mm	
		C2026.5003	5.0 mm	




* only for use with PROGRESSIVE-LINE Implants with screw-mounted insertion post.

General surgical instruments


	Article	Art. No.	Dimension
	Driver, extra short for screw implants, manual/wrench Material Stainless steel	J5300.0031*	13.7 mm
	Driver, short for screw implants, manual/wrench Material Stainless steel	J5300.0032*	19.2 mm
	Driver, long for screw implants, manual/wrench Material Stainless steel	J5300.0033*	24.8 mm
	Driver, short for screw implants, with ISO-shaft for angled hand piece (without hexagon at the shaft) Material Stainless steel	J5300.0036*	19.1 mm
	Driver, long for screw implants, with ISO-shaft for angled hand piece (without hexagon at the shaft) Material Stainless steel	J5300.0037*	28.2 mm
	Driver, short for screw implants, with ISO-shaft for angled hand piece (with hexagon at the shaft) Material Stainless steel	J5300.0034*	19.1 mm
	Driver, long for screw implants, with ISO-shaft for angled hand piece (with hexagon at the shaft) Material Stainless steel	J5300.0035*	28.2 mm
	Adapter ISO shaft for angled hand piece Material Stainless steel	J5002.0011	21.0 mm

General surgical instruments



	Article	Art. No.	Ø	Dimension
	Holding key for insertion post Material Stainless steel	J5302.0010	-	-
	CONELOG® Adapter for screw implants, short for CONELOG® Implants Material Stainless steel	C5302.3311	3.3 mm	28.1 mm
		C5302.4311	3.8 mm	
			4.3 mm	
		C5302.5011	5.0 mm	
	CONELOG® Adapter for screw implants, long for CONELOG® Implants Material Stainless steel	C5302.3310	3.3 mm	33.1 mm
		C5302.4310	3.8 mm	
			4.3 mm	
	Holding sleeve for screw implants color-coded Material Titanium alloy	J5302.3300	3.3 mm	-
		J5302.3800	3.8 mm	
		J5302.4300	4.3 mm	
		J5302.5000	5.0 mm	
	Screwdriver hex, extra short, manual/wrench Material Stainless steel	J5317.0510	-	14.5 mm
	Screwdriver hex, short, manual/wrench Material Stainless steel	J5317.0501	-	22.5 mm
	Screwdriver hex, long, manual/wrench Material Stainless steel	J5317.0502	-	30.3 mm

	Article	Art. No.	Dimension
	Screwdriver hex, short, ISO shaft Material Stainless steel	J5317.0504	18.0 mm
	Screwdriver hex, long, ISO shaft Material Stainless steel	J5317.0503	26.0 mm
	Manual screwdriver, hex without wrench head connection Material Stainless steel	J5317.0511	23.0 mm

Cover screws

	Article	Art. No.	Ø
	CONELOG® Implant cover screw Material Titanium alloy	C2019.3300	3.3 mm
		C2019.3800	3.8 mm
		C2019.4300	4.3 mm
		C2019.5000	5.0 mm






Healing caps

	Article	Art. No.	Ø	GH	G Ø
	CONELOG® Healing cap, cylindrical sterile Material Titanium alloy	C2015.3320	3.3 mm	2.0 mm	3.0 mm
		C2015.3340		4.0 mm	3.0 mm
		C2015.3820	3.8 mm	2.0 mm	3.5 mm
		C2015.3840		4.0 mm	3.5 mm
		C2015.3860*		6.0 mm	3.5 mm
		C2015.4320	4.3 mm	2.0 mm	3.8 mm
		C2015.4340		4.0 mm	3.8 mm
		C2015.4360*		6.0 mm	3.8 mm
		C2015.5020	5.0 mm	2.0 mm	4.5 mm
		C2015.5040		4.0 mm	4.5 mm
		C2015.5060*		6.0 mm	4.5 mm
	CONELOG® Healing cap, wide body sterile Material Titanium alloy	C2014.3340	3.3 mm	4.0 mm	4.8 mm
		C2014.3840	3.8 mm	4.0 mm	5.3 mm
		C2014.3860		6.0 mm	5.3 mm
		C2014.4340	4.3 mm	4.0 mm	5.8 mm
		C2014.4360		6.0 mm	5.8 mm
		C2014.5040	5.0 mm	4.0 mm	6.5 mm
		C2014.5060		6.0 mm	6.5 mm

* Suitable for bite registration



Impression taking

	Article	Art. No.	Ø
	CONELOG® Impression posts, open tray incl. fixing screw (The fixing screw can be shortened extra-oral by 3 mm with a screwdriver, hex) Material Titanium alloy	C2121.3300	3.3 mm
		C2121.3800	3.8 mm
		C2121.4300	4.3 mm
		C2121.5000	5.0 mm
	CONELOG® Impression posts, closed tray incl. impression cap, bite registration cap and fixing screw Material Titanium alloy/POM	C2110.3300	3.3 mm
		C2110.3800	3.8 mm
		C2110.4300	4.3 mm
		C2110.5000	5.0 mm
	Impression caps for impression post, closed tray (5 units) Material POM	J2111.3300	3.3 mm
		J2111.3800	3.8 mm
		J2111.4300	4.3 mm
		J2111.5000	5.0 mm
	CONELOG® Scanbodies* for optical, 3-dimensional localization of CONELOG® Implants in the mouth or CONELOG® Lab analogs in the working model, incl. abutment screw, sterile Not compatible with the CEREC® and inLab systems from Sirona® Material PEEK	C2600.3310	3.3 mm
		C2600.4310	3.8 mm
			4.3 mm
		C2600.5010	5.0 mm
	CONELOG® ScanPosts for Sirona® Scanbody for digital recording of the CONELOG® Implant or lab analog position and for further processing in the Sirona® CEREC® and inLab systems, incl. abutment screw Material Titanium alloy	C2620.3306	3.3 mm
		C2620.3806	3.8 mm
		C2620.4306	4.3 mm
		C2620.5006	5.0 mm

* Please check whether the CONELOG® Scanbody is available in the CAD software used. CAD libraries for selected CONELOG® Prosthetic components are available for free download at: www.camlog.com/en/media-center/cad-libraries

Matching Sirona® Scanbodies size S for CONELOG® ScanPosts and CONELOG® Titanium base CAD/CAM crown with Ø 3.3/3.8/4.3 mm:

For Omnicam®: Article number 6431311

For Bluecam®: Article number 6431295



Matching Sirona® Scanbodies size L for CONELOG® ScanPosts and CONELOG® Titanium base CAD/CAM crown with Ø 5.0 mm:

For Omnicam®: Article number 6431329



For Bluecam®: Article number 6431303

Sirona® Scanbodies are available from Dentsply Sirona®.


Bite registration

	Article	Art. No.	Ø
	CONELOG® Bite registration posts incl. fixing screw and bite registration cap Material Titanium alloy/POM	C2140.3300	3.3 mm
		C2140.3800	3.8 mm
		C2140.4300	4.3 mm
		C2140.5000	5.0 mm
	Bite registration caps (5 units) Material POM	J2112.3300	3.3 mm
		J2112.3800	3.8 mm
		J2112.4300	4.3 mm
		J2112.5000	5.0 mm

Fabrication of the plaster model



	Article	Art. No.	Ø
	CONELOG® Lab analog for cast models Material Titanium alloy	C3010.3300	3.3 mm
		C3010.3800	3.8 mm
		C3010.4300	4.3 mm
		C3010.5000	5.0 mm
	CONELOG® Implant analog for printed and cast models Material Titanium alloy	C3025.3300	3.3 mm
		C3025.3800	3.8 mm
		C3025.4300	4.3 mm
		C3025.5000	5.0 mm

Temporary restoration

	Article	Art. No.	Ø	GH
	CONELOG® Temporary abutment, crown, titanium alloy preparable, incl. abutment screw Material Titanium alloy	C2239.3300	3.3 mm*	-
		C2239.3800	3.8 mm	
		C2239.4300	4.3 mm	
		C2239.5000	5.0 mm	
	CONELOG® Temporary abutment, bridge, titanium alloy preparable, incl. abutment screw Material Titanium alloy	C2339.3300	3.3 mm	-
		C2339.3800	3.8 mm	
		C2339.4300	4.3 mm	
		C2339.5000	5.0 mm	

Esthomic® Abutments





Cemented crown and bridge restorations

	Article	Art. No.	Ø	GH
	CONELOG® Esthomic® Abutments, straight preparable, incl. abutment screw Material Titanium alloy	C2226.3815	3.8 mm	1.5 – 2.5 mm
		C2226.3830		3.0 – 4.5 mm
		C2226.4315	4.3 mm	1.5 – 2.5 mm
		C2226.4330		3.0 – 4.5 mm
		C2226.5015	5.0 mm	1.5 – 2.5 mm
		C2226.5030		3.0 – 4.5 mm
	CONELOG® Esthomic® Abutments, 15° angled, type A preparable, incl. abutment screw Material Titanium alloy	C2227.3815	3.8 mm	1.5 – 2.5 mm
		C2227.3830		3.0 – 4.5 mm
		C2227.4315	4.3 mm	1.5 – 2.5 mm
		C2227.4330		3.0 – 4.5 mm
		C2227.5015	5.0 mm	1.5 – 2.5 mm
		C2227.5030		3.0 – 4.5 mm

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors.

Esthomic® Abutments





Cemented crown and bridge restorations

	Article	Art. No.	Ø	GH
	CONELOG® Esthomic® Abutments, 15° angled, type B preparable, incl. abutment screw Material Titanium alloy	C2228.3815	3.8 mm	1.5 – 2.5 mm
		C2228.3830		3.0 – 4.5 mm
		C2228.4315	4.3 mm	1.5 – 2.5 mm
		C2228.4330		3.0 – 4.5 mm
		C2228.5015	5.0 mm	1.5 – 2.5 mm
		C2228.5030		3.0 – 4.5 mm
	CONELOG® Esthomic® Abutments, 20° angled, type A preparable, incl. abutment screw Material Titanium alloy	C2231.3815	3.8 mm	1.5 – 2.5 mm
		C2231.3830		3.0 – 4.5 mm
		C2231.4315	4.3 mm	1.5 – 2.5 mm
		C2231.4330		3.0 – 4.5 mm
		C2231.5015	5.0 mm	1.5 – 2.5 mm
		C2231.5030		3.0 – 4.5 mm
	CONELOG® Esthomic® Abutments, 20° angled, type B preparable, incl. abutment screw Material Titanium alloy	C2232.3815	3.8 mm	1.5 – 2.5 mm
		C2232.3830		3.0 – 4.5 mm
		C2232.4315	4.3 mm	1.5 – 2.5 mm
		C2232.4330		3.0 – 4.5 mm
		C2232.5015	5.0 mm	1.5 – 2.5 mm
		C2232.5030		3.0 – 4.5 mm
	CONELOG® Esthomic® Abutments, Inset preparable, incl. abutment screw Material Titanium alloy	C2235.3320	3.3 mm*	2.0 – 3.3 mm
		C2235.3820	3.8 mm	
		C2235.4320	4.3 mm	
		C2235.5020	5.0 mm	

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors.

CAD/CAM prosthetics

Crown, bridge and hybrid restorations






	Article	Art. No.	Ø	GH
	CONELOG® Titanium bases CAD/CAM, crown bonding base for individual CAD/CAM fabricated dental prosthesis, incl. dark purple anodized abutment screw and bonding aid (POM) Material Titanium alloy/POM	C2242.3308	3.3 mm*	0.8 mm
		C2242.3808	3.8 mm	
		C2242.4308	4.3 mm	
		C2242.5008	5.0 mm	
	CONELOG® Titanium bases CAD/CAM, crown bonding base for individual CAD/CAM fabricated dental prosthesis, incl. dark purple anodized abutment screw and bonding aid (POM) Material Titanium alloy/POM	C2242.3320	3.3 mm*	2.0 mm
		C2242.3820	3.8 mm	
		C2242.4320	4.3 mm	
		C2242.5020	5.0 mm	
	CONELOG® Titanium bases CAD/CAM, bridge bonding base for individual CAD/CAM fabricated dental prosthesis, incl. dark purple anodized abutment screw and bonding aid (POM) Material Titanium alloy/POM	C2342.3308	3.3 mm	0.8 mm
		C2342.3808	3.8 mm	
		C2342.4308	4.3 mm	
		C2342.5008	5.0 mm	
	CONELOG® Titanium bases CAD/CAM, bridge bonding base for individual CAD/CAM fabricated dental prosthesis, incl. dark purple anodized abutment screw and bonding aid (POM) Material Titanium alloy/POM	C2342.3320	3.3 mm	2.0 mm
		C2342.3820	3.8 mm	
		C2342.4320	4.3 mm	
		C2342.5020	5.0 mm	

The geometries of the CONELOG® Titanium bases CAD/CAM are available as a CAD library for leading dental CAD systems. The libraries are available for free download at: www.camlog.com/en/media-center/cad-libraries.

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors.

CAD/CAM prosthetics

Crown, bridge and hybrid restorations

	Article	Art. No.	Ø	Thread
 <p>11 mm</p>	CONELOG® Modeling aids for CAMLOG® Titanium bases CAD/CAM burn-out, for fabricating mesostructures and crowns Material POM	C2242.3302	3.3 mm	-
		C2242.3802	3.8 mm	
		C2242.4302	4.3 mm	
		C2242.5002	5.0 mm	
	CONELOG® Abutment screw for CONELOG® Titanium bases CAD/CAM dark purple anodized Material Titanium alloy	C4015.1601	3.3 mm	M 1.6
			3.8 mm	
			4.3 mm	
		C4015.2001	5.0 mm	M 2.0
	CONELOG® Lab screw for CONELOG® Titanium bases CAD/CAM brown partial anodized Material Titanium alloy	C4016.1601	3.3 mm	M 1.6
			3.8 mm	
			4.3 mm	
		C4016.2001	5.0 mm	M 2.0
 <p>10 mm</p>	CONELOG® Scanbodies* for optical, 3-dimensional localization of CONELOG® Implants in the mouth or CONELOG® Lab analogs in the working model, incl. abutment screw, sterile Not compatible with the CEREC® and inLab systems from Sirona® Material PEEK	C2600.3310	3.3 mm	-
		C2600.4310	3.8 mm	
			4.3 mm	
		C2600.5010	5.0 mm	
 <p>10.2 mm</p>	CONELOG® ScanPosts for Sirona® Scanbody for digital recording of the CONELOG® Implant or lab analog position and for further processing in the Sirona® CEREC® and inLab systems, incl. abutment screw Material Titanium alloy	C2620.3306	3.3 mm	-
		C2620.3806	3.8 mm	
		C2620.4306	4.3 mm	
		C2620.5006	5.0 mm	

* Please check whether the CONELOG® Scanbody is available in the CAD software used. CAD libraries for selected CONELOG® Prosthetic components are available for free download at: www.camlog.com/en/media-center/cad-libraries

Matching Sirona® Scanbodies size S for CONELOG® ScanPosts and CONELOG® Titanium base CAD/CAM crown with Ø 3.3/3.8/4.3 mm:

For Omnicam®: Article number 6431311

For Bluecam®: Article number 6431295

Matching Sirona® Scanbodies size L for CONELOG® ScanPosts and CONELOG® Titanium base CAD/CAM crown with Ø 5.0 mm:

For Omnicam®: Article number 6431329

For Bluecam®: Article number 6431303

Sirona® Scanbodies are available from Dentsply Sirona®.

CAM titanium blanks

Milling production process of individualized one-piece abutments and healing caps by CAD/CAM technology

	Article	Art. No.	Ø
	CONELOG® CAM titanium blank, type IAC* Ø 12 mm, length 12.5 mm (2 units), sent with 2 separate packed abutment screws Material Titanium alloy	C2411.3313	3.3 mm
		C2411.4313	3.8 mm
			4.3 mm
		C2411.5013	5.0 mm
	CONELOG® CAM titanium blank, type ME** Ø 12 mm, length 20 mm (2 units), sent with 2 separate packed abutment screws Material Titanium alloy	C2421.3320	3.3 mm
		C2421.3820	3.8 mm
		C2421.4320	4.3 mm
		C2421.5020	5.0 mm

Accessories for CAM titanium blanks, type IAC

	Article	Art. No.	Ø
	CONELOG® Collet for CAM blank, type IAC* Ø 6 mm, length 17 mm, incl. 2 fixing screws for CAM blank, type IAC Material Stainless steel	C3720.3300	3.3 mm
		C3720.4300	3.8 mm
			4.3 mm
		C3720.5000	5.0 mm

* Type IAC

For the milling process, the CAM titanium blank type IAC is fixated to the implant-abutment connection via the CONELOG® Collet for CAM blanks. The machine-specific holders and adapters for the collet as well as the milling strategies are to be provided by the user.

** Type ME

For the milling process, the CAM titanium blank type ME is fixated with the front-facing groove of its cylindrical section via a milling holder for PreFace® Abutments from Medentika®. These milling holders are available for selected machines from the particular machine manufacturer.


The CAM titanium blanks require product specific CAM libraries which are available on request for selected CAM softwares from the software provider.

The geometries of the CONELOG® CAM Titanium Blanks are available as a CAD library for leading dental CAD systems. The libraries are available for free download at:

www.camlog.com/en/media-center/cad-libraries.


Universal abutments

Cemented crown and bridge restorations

	Article	Art. No.	Ø	Dimension
 11 mm	CONELOG® Universal abutments preparable, incl. abutment screw Material Titanium alloy	C2211.3300	3.3 mm*	-
		C2211.3800	3.8 mm	
		C2211.4300	4.3 mm	
		C2211.5000	5.0 mm	

Gold-plastic abutment






Cemented crown and bridge restorations

	Article	Art. No.	Ø	Noble metal weight
 11.7 mm	CONELOG® Gold-plastic abutment cast-on, incl. abutment screw Material Cast-on gold alloy/POM	C2246.3300	3.3 mm*	ca. 0.31 g
		C2246.3800	3.8 mm	ca. 0.36 g
		C2246.4300	4.3 mm	ca. 0.36 g
		C2246.5000	5.0 mm	ca. 0.55 g




* only for crown restorations in the region of the upper lateral and lower lateral and central incisors (Ø 3.3 mm not for double crown restorations).

Logfit® Prosthetic system


Cemented crown and bridge restorations

	Article	Art. No.	Ø	GH
	CONELOG® Logfit® Abutments incl. abutment screw Material Titanium alloy	C2550.3810	3.8 mm	1.0 mm
		C2550.3825		2.5 mm
		C2550.4310	4.3 mm	1.0 mm
		C2550.4325		2.5 mm
		C2550.5010	5.0 mm	1.0 mm
		C2550.5025		2.5 mm
	Logfit® Impression caps Material POM	J2551.4300	3.8 mm	-
			4.3 mm	
		J2551.6000	5.0 mm	
	Logfit® Analog Material Titanium alloy	J2552.4300	3.8 mm	-
			4.3 mm	
		J2552.6000	5.0 mm	
	Logfit® Plastic copings, for crowns (with rotation securing device) burn-out Material POM	J2553.4302	3.8 mm	-
			4.3 mm	
		J2553.6002	5.0 mm	
	Logfit® Plastic copings, for bridges (without rotation securing device) burn-out Material POM	J2553.4301	3.8 mm	-
			4.3 mm	
		J2553.6001	5.0 mm	

Ball abutment anchoring system




	Article	Art. No.	Ø	GH
	CONELOG® Ball abutment male part incl. stabilizing ring Material Titanium alloy/Plastic	C2249.3315	3.3 mm	1.5 mm
		C2249.3330		3.0 mm
		C2249.3815	3.8 mm	1.5 mm
		C2249.3830		3.0 mm
		C2249.3845	4.3 mm	4.5 mm
		C2249.4315		1.5 mm
		C2249.4330		3.0 mm
		C2249.4345	5.0 mm	4.5 mm
		C2249.5015		1.5 mm
		C2249.5030		3.0 mm
		C2249.5045		4.5 mm
	Matrix CM Dalbo®-Plus for ball abutment, incl. lamella retention insert Material Titanium Grade 4/Gold alloy	05003503	3.3 mm	-
			3.8 mm	
			4.3 mm	
			5.0 mm	
	Lamella retention insert for matrix CM Dalbo®-Plus Material Gold alloy	05003504	3.3 mm	-
			3.8 mm	
			4.3 mm	
			5.0 mm	

Dalbo®-Plus is a registered trademark of Cendres + Métaux SA, Biel, Switzerland.

	Article	Art. No.	Ø	GH
	Ball abutment analogs incl. stabilizing ring Material Brass/Plastic	C3015.3300	3.3 mm	-
			3.8 mm	
			4.3 mm	
		C3015.5000	5.0 mm	








Locator® Anchoring system

CONELOG® Locator R-Tx®

	Article	Art. No.	Ø	GH
	CONELOG® Locator R-Tx® Abutment incl. titanium housing with processing replacement male black, block-out spacer white and four different retention inserts Material Titanium alloy/Nylon	30805-01	3.3 mm	1.0 mm
		30805-02		2.0 mm
		30805-03		3.0 mm
		30805-04		4.0 mm
		30806-01	3.8 mm	1.0 mm
		30806-02		2.0 mm
		30806-03		3.0 mm
		30806-04		4.0 mm
		30806-05		5.0 mm
		30807-01	4.3 mm	1.0 mm
		30807-02		2.0 mm
		30807-03		3.0 mm
		30807-04		4.0 mm
		30807-05		5.0 mm
		30808-01	5.0 mm	1.0 mm
		30808-02		2.0 mm
		30808-03		3.0 mm
		30808-04		4.0 mm
		30808-05		5.0 mm
	Locator R-Tx® Impression coping (4 units) Material Polyethylene	30017-01	3.3 mm	-
			3.8 mm	
			4.3 mm	
			5.0 mm	
	Locator R-Tx® Analog Ø 3.35 mm (4 units) Material Aluminum	30014-01	3.3 mm	-
			3.8 mm	
			4.3 mm	


Locator® Anchoring system

CONELOG® Locator R-Tx®

	Article	Art. No.	Ø	GH
	Locator R-Tx® Analog Ø 5.0 mm (4 units) Material Aluminum	30016-01	5.0 mm	-
	Locator R-Tx® Titanium housing with processing insert black (4 units) Material Titanium alloy/Polyethylene	30013-01	3.3 mm 3.8 mm 4.3 mm 5.0 mm	-
	Locator R-Tx® Processing insert black (4 units) Material Polyethylene	30012-01	3.3 mm 3.8 mm 4.3 mm 5.0 mm	-
	Locator R-Tx® Processing spacer (4 units) Material Polyethylene	30018-01	3.3 mm 3.8 mm 4.3 mm 5.0 mm	-
	Locator R-Tx® Retention insert gray, ZERO RETENTION (4 units) Material Nylon	30001-01	3.3 mm 3.8 mm 4.3 mm 5.0 mm	-
	Locator R-Tx® Retention insert blue, LIGHT (4 units) Material Nylon	30002-01	3.3 mm 3.8 mm 4.3 mm 5.0 mm	-
	Locator R-Tx® Retention insert pink, MEDIUM (4 units) Material Nylon	30003-01	3.3 mm 3.8 mm 4.3 mm 5.0 mm	-




Locator® Anchoring system

CONELOG® Locator R-Tx®

	Article	Art. No.	Ø	GH
	Locator R-Tx® Retention insert white, STRONG (4 units) Material Nylon	30004-01	3.3 mm	-
			3.8 mm	
			4.3 mm	
			5.0 mm	






Locator® Anchoring system

CONELOG® Locator®

	Article	Art. No.	Ø	GH
	CONELOG® Locator® Abutment Material Titanium alloy/TiN	C2253.3310	3.3 mm	1.0 mm
		C2253.3320		2.0 mm
		C2253.3330		3.0 mm
		C2253.3340		4.0 mm
		C2253.3810	3.8 mm	1.0 mm
		C2253.3820		2.0 mm
		C2253.3830		3.0 mm
		C2253.3840		4.0 mm
		C2253.3850		5.0 mm
		C2253.4310	4.3 mm	1.0 mm
		C2253.4320		2.0 mm
		C2253.4330		3.0 mm
		C2253.4340		4.0 mm
		C2253.4350		5.0 mm
		C2253.5010	5.0 mm	1.0 mm
		C2253.5020		2.0 mm
		C2253.5030		3.0 mm
		C2253.5040		4.0 mm
		C2253.5050		5.0 mm
	Locator® Impression cap (4 units) Material Aluminum/Polyethylene	J2253.0200	3.3 mm	-
			3.8 mm	
			4.3 mm	
			5.0 mm	
	Locator® Analog (4 units) Material Aluminum	J2253.0340	3.3 mm	-
			3.8 mm	
			4.3 mm	
			5.0 mm	

Locator® Anchoring system







CONELOG® Locator®

	Article	Art. No.	Ø
	Locator® Male processing package (2 units) Content per package: 1 Titanium housing with processing replacement male 1 Block out spacer white 1 Replacement male clear 1 Replacement male pink 1 Replacement male blue Material Titanium alloy/Polyethylene/Teflon/Nylon	J2253.0102	3.3 mm
			3.8 mm
			4.3 mm
			5.0 mm
	Locator® Male processing package for extended range (2 units) Content per package: 1 Titanium housing with processing replacement male 1 Block out spacer white 1 Replacement male green, 1 Replacement male orange, 1 Replacement male red Material Titanium alloy/Polyethylen/Teflon/Nylon	J2253.0112	3.8 mm
			4.3 mm
			5.0 mm
	Locator® Block out spacer (20 units) Material Teflon	J2253.0401	3.3 mm
			3.8 mm
			4.3 mm
			5.0 mm
	Locator® Processing replacement male (4 units) Material Polyethylen	J2253.0402	3.3 mm
			3.8 mm
			4.3 mm
			5.0 mm
	Locator® Replacement male clear, STRONG, Div.: 0°-10° (4 units) Material Nylon	J2253.1005	3.3 mm
			3.8 mm
			4.3 mm
			5.0 mm

Prosthetics

Locator® Anchoring system

CONELOG® Locator®



	Article	Art. No.	Ø
	Locator® Replacement male pink, MEDIUM, Div.: 0° – 10° (4 units) Material Nylon	J2253.1003	3.3 mm
			3.8 mm
			4.3 mm
			5.0 mm
	Locator® Replacement male blue, LIGHT, Div.: 0° – 10° (4 units) Material Nylon	J2253.1002	3.3 mm
			3.8 mm
			4.3 mm
			5.0 mm
	Locator® Replacement male for extended range* green, STRONG, Div.: 10° – 20° (4 units) Material Nylon	J2253.2004	3.8 mm
			4.3 mm
			5.0 mm
	Locator® Replacement male for extended range* orange, MEDIUM, Div.: 10° – 20° (4 units) Material Nylon	J2253.2003	3.8 mm
			4.3 mm
			5.0 mm
	Locator® Replacement male for extended range* red, LIGHT, Div.: 10° – 20° (4 units) Material Nylon	J2253.2002	3.8 mm
			4.3 mm
			5.0 mm
	Locator® Replacement male for extended range* gray, NO RETENTION, Div.: 0° – 20° (4 units) Material Nylon	J2253.2000	3.8 mm
			4.3 mm
			5.0 mm

* not permitted for implant Ø 3.3 mm.



Manufacturer Locator®: Zest Anchors, 2875 Loker Avenue East, Carlsbad, California 92010, USA

Locator® and Locator R-Tx® are registered trademarks of Zest Anchors

Double crown restoration




	Article	Art. No.	Ø
 11 mm	CONELOG® Universal abutments for double crown restorations preparable, incl. abutment screw Material Titanium alloy	C2211.3800	3.8 mm
		C2211.4300	4.3 mm
		C2211.5000	5.0 mm
 12 mm	CONELOG® Telescope abutments for double crown restorations preparable, incl. abutment screw Material Titanium alloy	C2212.3800	3.8 mm
		C2212.4300	4.3 mm
		C2212.5000	5.0 mm

Accessories for abutments

	Article	Art. No.	Ø	Thread
	CONELOG® Abutment screw, hex for definitive screw retention of abutments into the implant Material Titanium alloy	C4005.1601	3.3 mm	M 1.6
			3.8 mm	
			4.3 mm	
		C4005.2001	5.0 mm	M 2.0
	CONELOG® Lab screw, hex for the fixation of abutments on the working model, brown anodized Material Titanium alloy	C4006.1601	3.3 mm	M 1.6
			3.8 mm	
			4.3 mm	
		C4006.2001	5.0 mm	M 2.0






Lab screws may not be used on patients.

Prosthetic instruments







	Article	Art. No.	L
	Prosthetic tray (without content) Material Plastic	J5330.8500	197 x 108 x 54 mm
	Prosthetic tray universal (without content) resterilizable Material Radel®/Silicone	J5330.8700	162 x 73 x 29 mm
	Torque wrench with continuous torque adjustment until maximal 30 Ncm Material Stainless steel	J5320.1030*	-
	Driver for ball abutment, manual/wrench Material Stainless steel	J5300.0011	18.3 mm
	Screwdriver Activator for ball abutment matrix CM Dalbo®-Plus Material Stainless steel	07000389	-

* The torque wrench can be locked and used as a surgical ratchet for implant insertion.





Prosthetic instruments

	Article	Art. No.	L
	Driver for Locator®, manual/wrench Material Stainless steel	J2253.0001	24.3 mm
	Locator® Instrument threepart Material Stainless steel	J2253.0002	83.0 mm
	Locator® Abutment holder sleeve for golden component of the Locator® Instrument (4 units) Material Polysulfone	08394	-
	Locator® Angle measurement guide Material Stainless steel	J2253.0003	-
	Locator® Parallel post (4 units) Material Polyethylene	J2253.0004	-





Prosthetic instruments

	Article	Art. No.	Dimension
	Locator R-Tx® Retention insert tool with plastic grip Material Stainless steel	30021-01	
	Screwdriver Hex, extra short, manual/wrench Material Stainless steel	J5317.0510	14.5 mm
	Screwdriver Hex, short, manual/wrench Material Stainless steel	J5317.0501	22.5 mm
	Screwdriver Hex, long, manual/wrench Material Stainless steel	J5317.0502	30.3 mm
	Screwdriver Hex, short, ISO shaft Material Stainless steel	J5317.0504	18.0 mm
	Screwdriver Hex, long, ISO shaft Material Stainless steel	J5317.0503	26.0 mm

Prosthetic instruments

	Article	Art. No.	Ø	Dimension
	Manual screwdriver Hex, without wrench head connection Material Stainless steel	J5317.0511	-	23.0 mm
	Handle for CAMLOG®/CONELOG® Implant analog Material Stainless steel	J3025.0010	3.3 mm 3.8 mm 4.3 mm	-
		J3025.0015	5.0 mm	
	CONELOG® Disconnecter for CONELOG® Abutments, short Material Stainless steel	C5300.1601	3.3 mm 3.8 mm 4.3 mm	Thread M 1.6
		C5300.2001	5.0 mm	Thread M 2.0
	CONELOG® Disconnecter for CONELOG® Abutments, long Material Stainless steel	C5300.1603	3.3 mm 3.8 mm 4.3 mm	Thread M 1.6
		C5300.2003	5.0 mm	Thread M 2.0

Instruments for dental technicians

	Article	Art. No.	Ø
	Universal holder incl. 2 CONELOG® Lab screws, hex, and 1 CONELOG® Abutment collet each for Ø 3.3/3.8/4.3/5.0 mm Material Stainless steel/Titanium alloy	C3709.0010	-
	Universal holder Material Stainless steel	J3709.0015	-
	CONELOG® Abutment collets for universal holder, for grinding CAMLOG® Abutments Material Titanium alloy	C3709.3300	3.3 mm
		C3709.3800	3.8 mm
		C3709.4300	4.3 mm
		C3709.5000	5.0 mm
	Reworking reamer, for base for bar abutment plane surface, burn-out Material Stainless steel/Brass	J3711.0010	3.3 mm
		J3711.0015	5.0 mm
	Reworking reamer, for base for bar abutment screw seat, burn-out Material Stainless steel/Brass	J3711.0020	3.3 mm
		J3711.0025	5.0 mm
















Selection abutments












	Article	Art. No.
	CONELOG® Selection abutment kit (Content: 2 units each, according table below)	C8011.1000

Content: CONELOG® Selection abutment kit					
Description	Material	Ø			GH
CONELOG® Esthomic® Selection abutment, straight*	POM	3.8 mm	4.3 mm	5.0 mm	1.5 – 2.5 mm
CONELOG® Esthomic® Selection abutment, 15° angled, type A*					3.0 – 4.5 mm
CONELOG® Esthomic® Selection abutment, 15° angled, type B*					1.5 – 2.5 mm
CONELOG® Esthomic® Selection abutment, 20° angled, type A*					
CONELOG® Esthomic® Selection abutment, 20° angled, type B*					

* These products are not available individually.
 Attention, do not use selection abutments on patients!



Indication overview

Single tooth restoration		Bridge restoration
Cemented	Screwed	Cemented
	 <p>Temporary abutment, crown, titanium alloy</p>	
 <p>Esthomic® Abutments</p>		 <p>Esthomic® Abutments</p>
 <p>Titanium bases CAD/CAM, crown</p>	 <p>Titanium bases CAD/CAM, crown</p>	 <p>Titanium bases CAD/CAM, bridge</p>
 <p>Logfit® Abutment</p>		 <p>Logfit® Abutment</p>
  <p>Universal abutment CAM titanium blank</p>		  <p>Universal abutment CAM titanium blank</p>
 <p>Gold-plastic abutment</p>	 <p>Gold-plastic abutment</p>	 <p>Gold-plastic abutment</p>

Bridge restoration	Hybrid restoration
Screwed	Removable (full denture)
 <p>Temporary abutment, bridge, titanium alloy</p>	
 <p>Multi-unit Abutments</p>	 <p>Multi-unit Abutments</p>
 <p>Titanium bases CAD/CAM, bridge</p>	
	 <p>Locator® Anchoring system</p>
	 <p>Ball abutment</p>
Double crown restoration	  <p>Universal abutment CAM titanium blank</p>
	 <p>Telescope abutment</p>
	 <p>Gold-plastic abutment</p>
	 <p>Titanium bases CAD/CAM, crown</p>






Implant overview


	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
Article	Art. No. A Ø				L
 CONELOG® PROGRESSIVE-LINE Implant, Promote® plus with screw-mounted insertion post	-	C1085.3807 A Ø 3.0 mm	C1085.4307 A Ø 3.0 mm	C1085.5007 A Ø 3.5 mm	7 mm
	C1085.3309 A Ø 2.2 mm	C1085.3809 A Ø 3.0 mm	C1085.4309 A Ø 3.0 mm	C1085.5009 A Ø 3.5 mm	9 mm
	C1085.3311 A Ø 2.2 mm	C1085.3811 A Ø 2.7 mm	C1085.4311 A Ø 2.7 mm	C1085.5011 A Ø 3.2 mm	11 mm
	C1085.3313 A Ø 2.2 mm	C1085.3813 A Ø 2.7 mm	C1085.4313 A Ø 2.7 mm	C1085.5013 A Ø 3.2 mm	13 mm
	C1085.3316 A Ø 2.2 mm	C1085.3816 A Ø 2.7 mm	C1085.4316 A Ø 2.7 mm	C1085.5016 A Ø 3.2 mm	16 mm
 CONELOG® PROGRESSIVE-LINE Implant, Promote® plus with snap-in insertion post	-	C1086.3807 A Ø 3.0 mm	C1086.4307 A Ø 3.0 mm	C1086.5007 A Ø 3.5 mm	7 mm
	C1086.3309 A Ø 2.2 mm	C1086.3809 A Ø 3.0 mm	C1086.4309 A Ø 3.0 mm	C1086.5009 A Ø 3.5 mm	9 mm
	C1086.3311 A Ø 2.2 mm	C1086.3811 A Ø 2.7 mm	C1086.4311 A Ø 2.7 mm	C1086.5011 A Ø 3.2 mm	11 mm
	C1086.3313 A Ø 2.2 mm	C1086.3813 A Ø 2.7 mm	C1086.4313 A Ø 2.7 mm	C1086.5013 A Ø 3.2 mm	13 mm
	C1086.3316 A Ø 2.2 mm	C1086.3816 A Ø 2.7 mm	C1086.4316 A Ø 2.7 mm	C1086.5016 A Ø 3.2 mm	16 mm

Prosthetics overview



Impression taking

		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
Article		Art. No.				GH
	CONELOG® Impression posts, open tray	C2121.3300	C2121.3800	C2121.4300	C2121.5000	-
	CONELOG® Impression posts, closed tray	C2110.3300	C2110.3800	C2110.4300	C2110.5000	-
	Impression caps for impression post, closed tray	J2111.3300	J2111.3800	J2111.4300	J2111.5000	-








Bite registration

	CONELOG® Bite registration posts incl. fixing screw and bite registration cap	C2140.3300	C2140.3800	C2140.4300	C2140.5000	-
---	--	------------	------------	------------	------------	---

Fabrication of the plaster model














		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
Article		Art. No.				GH
	CONELOG® Lab analogs, for cast models	C3010.3300	C3010.3800	C3010.4300	C3010.5000	
	CONELOG® Implant analog, for printed and cast models	C3025.3300	C3025.3800	C3025.4300	C3025.5000	-

Abutments for crown and bridge restoration

	CONELOG® Temporary abutments, crown, titanium alloy	C2239.3300	C2239.3800	C2239.4300	C2239.5000	-
	CONELOG® Temporary abutments, bridge, titanium alloy	C2339.3300	C2339.3800	C2339.4300	C2339.5000	-
	CONELOG® Esthomic® Abutments, straight	-	C2226.3815	C2226.4315	C2226.5015	1.5 – 2.5
			C2226.3830	C2226.4330	C2226.5030	3.0 – 4.5
	CONELOG® Esthomic® Abutments, 15° angled, type A	-	C2227.3815	C2227.4315	C2227.5015	1.5 – 2.5
			C2227.3830	C2227.4330	C2227.5030	3.0 – 4.5
	CONELOG® Esthomic® Abutments, 15° angled, type B	-	C2228.3815	C2228.4315	C2228.5015	1.5 – 2.5
			C2228.3830	C2228.4330	C2228.5030	3.0 – 4.5
	CONELOG® Esthomic® Abutments, 20° angled, type A	-	C2231.3815	C2231.4315	C2231.5015	1.5 – 2.5
			C2231.3830	C2231.4330	C2231.5030	3.0 – 4.5
	CONELOG® Esthomic® Abutments, 20° angled, type B	-	C2232.3815	C2232.4315	C2232.5015	1.5 – 2.5
			C2232.3830	C2232.4330	C2232.5030	3.0 – 4.5














Prosthetics overview

Abutments for crown and bridge restorations

		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
Article		Art. No.				GH
	CONELOG® Esthomic® Abutments Inset	C2235.3320	C2235.3820	C2235.4320	C2235.5020	2.0 – 3.3 mm
	CONELOG® Universal abutments	C2211.3300	C2211.3800	C2211.4300	C2211.5000	-
	CONELOG® Gold-plastic abutments	C2246.3300	C2246.3800	C2246.4300	C2246.5000	-
	CONELOG® Titanium bases CAD/CAM, crown	C2242.3308	C2242.3808	C2242.4308	C2242.5008	0.8 mm
		C2242.3320	C2242.3820	C2242.4320	C2242.5020	2.0 mm
	CONELOG® Titanium bases CAD/CAM, bridge	C2342.3308	C2342.3808	C2342.4308	C2342.5008	0.8 mm
		C2342.3320	C2342.3820	C2342.4320	C2342.5020	2.0 mm
	CONELOG® Logfit® Abutments	-	C2550.3810	C2550.4310	C2550.5010	1.0 mm
		-	C2550.3825	C2550.4325	C2550.5025	2.5 mm
	Straight Multi-unit Abutments for CONELOG®	BC2255.3320	BC2255.4320	BC2255.4320	-	2 mm
		BC2255.3330	BC2255.4330	BC2255.4330	-	3 mm
		BC2255.3340	BC2255.4340	BC2255.4340	-	4 mm
	17° Angled Multi-unit Abutments for CONELOG® Type A	BC2256.3320	BC2256.4320	BC2256.4320	-	2 mm
		BC2256.3330	BC2256.4330	BC2256.4330	-	3 mm
		BC2256.3340	BC2256.4340	BC2256.4340	-	4 mm
	17° Angled Multi-unit Abutments for CONELOG® Type B	BC2257.3320	BC2257.4320	BC2257.4320	-	2 mm
		BC2257.3330	BC2257.4330	BC2257.4330	-	3 mm
		BC2257.3340	BC2257.4340	BC2257.4340	-	4 mm
	30° Angled Multi-unit Abutments for CONELOG® Type A	BC2258.3320	BC2258.4320	BC2258.4320	-	2 mm
		BC2258.3330	BC2258.4330	BC2258.4330	-	3 mm
		BC2258.3340	BC2258.4340	BC2258.4340	-	4 mm
	30° Angled Multi-unit Abutments for CONELOG® Type B	BC2259.3320	BC2259.4320	BC2259.4320	-	2 mm
		BC2259.3330	BC2259.4330	BC2259.4330	-	3 mm
		BC2259.3340	BC2259.4340	BC2259.4340	-	4 mm
	Logfit® Plastic copings, for crowns	-	J2553.4302	J2553.4302	J2553.6002	-
	Logfit® Plastic copings, for bridges	-	J2553.4301	J2553.4301	J2553.6001	-








Prosthetics overview

Hybrid restoration







		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
Article		Art. No.				GH
	CONELOG® Ball abutment, male part	C2249.3315	C2249.3815	C2249.4315	C2249.5015	1.5 mm
		C2249.3330	C2249.3830	C2249.4330	C2249.5030	3.0 mm
		-	C2249.3845	C2249.4345	C2249.5045	4.5 mm
	Matrix CM Dalbo®-Plus	05003503	05003503	05003503	05003503	-
	Ball abutment analog	C3015.3300	C3015.3300	C3015.3300	C3015.5000	-
	CONELOG® Locator R-Tx® Abutment	30805-01	30806-01	30807-01	30808-01	1.0 mm
		30805-02	30806-02	30807-02	30808-02	2.0 mm
		30805-03	30806-03	30807-03	30808-03	3.0 mm
		30805-04	30806-04	30807-04	30808-04	4.0 mm
		-	30806-05	30807-05	30808-05	5.0 mm
	Locator R-Tx® Impression coping	30017-01	30017-01	30017-01	30017-01	-
	Locator R-Tx® Analog	30014-01	30014-01	30014-01	30016-01	-
	Locator R-Tx® Titanium housing	30013-01	30013-01	30013-01	30013-01	-
	Locator R-Tx® Processing insert	30012-01	30012-01	30012-01	30012-01	-
	Locator R-Tx® Processing spacer	30018-01	30018-01	30018-01	30018-01	-
	Locator R-Tx® Retention insert gray, ZERO RETENTION	30001-01	30001-01	30001-01	30001-01	-
	Locator R-Tx® Retention insert blue, LIGHT	30002-01	30002-01	30002-01	30002-01	-
	Locator R-Tx® Retention insert pink, MEDIUM	30003-01	30003-01	30003-01	30003-01	-
	Locator R-Tx® Retention insert white, STRONG	30004-01	30004-01	30004-01	30004-01	-

Prosthetics overview

Hybrid restoration










		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
Article		Art. No.				GH
	CONELOG® Locator® Abutment	C2253.3310	C2253.3810	C2253.4310	C2253.5010	1.0 mm
		C2253.3320	C2253.3820	C2253.4320	C2253.5020	2.0 mm
		C2253.3330	C2253.3830	C2253.4330	C2253.5030	3.0 mm
		C2253.3340	C2253.3840	C2253.4340	C2253.5040	4.0 mm
		-	C2253.3850	C2253.4350	C2253.5050	5.0 mm
	Locator® Impression cap	J2253.0200	J2253.0200	J2253.0200	J2253.0200	-
	Locator® Analog	J2253.0340	J2253.0340	J2253.0340	J2253.0340	-
	Locator® Male processing package	J2253.0102	J2253.0102	J2253.0102	J2253.0102	-
	Locator® Male processing package for extended range	-	J2253.0112	J2253.0112	J2253.0112	-
	CONELOG® Universal abutment	-	C2211.3800	C2211.4300	C2211.5000	-
	CONELOG® Telescope abutment	-	C2212.3800	C2212.4300	C2212.5000	-

CAD/CAM prosthetics

	CONELOG® Scanbodies	C2600.3310	C2600.4310	C2600.4310	C2600.5010	-
	CONELOG® ScanPost for Sirona® Scanbody	C2620.3306	C2620.3806	C2620.4306	C2620.5006	-
	CONELOG® CAM titanium blank, type IAC	C2411.3313	C2411.4313	C2411.4313	C2411.5013	-
	CONELOG® CAM titanium blank, type ME	C2421.3320	C2421.3820	C2421.4320	C2421.5020	-
	CONELOG® Titanium bases CAD/CAM	C2242.3308	C2242.3808	C2242.4308	C2242.5008	0.8 mm
		C2242.3320	C2242.3820	C2242.4320	C2242.5020	2.0 mm
	CONELOG® Titanium bases CAD/CAM	C2342.3308	C2342.3808	C2342.4308	C2342.5008	0.8 mm
		C2342.3320	C2342.3820	C2342.4320	C2342.5020	2.0 mm

Screw overview Abutment and prosthetic screws – intraoral use

Implant-Abutment connection

	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
	M 1.6			M 2.0	
Article	CONELOG® Abutment screw				Tightening torque
 <p>Scanbody ScanPost for Sirona® Scanbody</p>					tightened by hand**
 <p>Temporary abutments titanium, crown and bridge</p>					
 <p>Esthomic® Abutments</p>					8.9 mm  C4005.1601
 <p>Universal abutment Telescope abutment Gold-plastic abutment Logfit® Abutment</p>					
 <p>CONELOG® CAM titanium blank, type IAC and ME</p>					
Article	CONELOG® Abutment screws for titanium bases CAD/CAM, dark purple anodized				Tightening torque
 <p>Titanium bases CAD/CAM, crown and bridge</p>	8.9 mm  C4015.1601			8.9 mm  C4015.2001	20 Ncm*


















* with torque wrench J5320.1030

** Optional for temporary abutments titanium: torque after completed healing phase 20 Ncm.

All screws must be retightened with the corresponding torque after at least 5 minutes!

Screw overview Lab screws – extraoral use













Lab analog-Abutment connection

	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	
		M 1.6		M 2.0	
Article	CONELOG® Lab screws*, brown anodized				Tightening torque
 <p>Scanbody ScanPost for Sirona® Scanbody</p>	 8.9 mm C4006.1601  8.9 mm C4006.2001				tightened by hand
 <p>Temporary abutments titanium, crown and bridge</p>					
 <p>Esthomic® Abutments</p>					
 <p>Universal abutment Telescope abutment Gold-plastic abutment</p>					
 <p>Vario SR abutments, 20° and 30° angled</p>					
 <p>CONELOG® CAM titanium blank, type IAC and ME</p>					
Article	CONELOG® Lab screws for titanium bases CAD/CAM*, brown anodized				Tightening torque
 <p>Titanium bases CAD/CAM, crown and bridge</p>	 8.9 mm C4016.1601  8.9 mm C4016.2001				tightened by hand
Article	CONELOG® Bonding aids**				Tightening torque
 <p>Titanium bases CAD/CAM, crown and bridge</p>	 26 mm  26 mm				tightened by hand
Article	CONELOG® Vario SR lab screws*, brown anodized				Tightening torque
 <p>Vario SR abutment, straight</p>	 10.6 mm C4008.1600  10.6 mm C4008.2000				tightened by hand

* Lab screws may not be used on patients.

** not available individually, are included in the packaging of the titanium base CAD/CAM.

Overview Tightening torque




Article	Instrument	Tightening torque
 Implant cover screw		tightened by hand**
 Healing caps cylindrical, wide body, bottleneck		
 Impression posts Bite registration post		
 Lab screws		
 Lab screws with reduced head		
 Temporary abutments titanium, crown and bridge	 J5317.0510 J5317.0501 J5317.0502	20 Ncm*
 Abutment screws Abutment screws with reduced head		
 Esthomic® Abutment, straight Esthomic® Abutment, angled 15°/20° Esthomic® Abutment, Inset		
 Universal abutment Telescope abutment Gold-plastic abutment		
 Logfit® Abutments Titanium bases CAD/CAM, crown and bridge		
 CONELOG® CAM titanium blank, type IAC and ME		

* with the torque wrench J5320.1030

** Optional for temporary abutments titanium: torque after completed healing phase 20 Ncm.

All screws must be retightened with the corresponding torque after at least 5 minutes!

Overview Tightening torque

		3.33.84.35.0			
Article		Instrument		Tightening torque	
	Ball abutments	 J5300.0011		20 Ncm*	30 Ncm*
	Locator® Abutments	 J2253.0001			
	Locator® Fixture for bar abutment			20 Ncm*	
	Scanbodies	 J5317.0501  J5317.0502		tightened by hand	
	ScanPosts for Sirona® Scanbody				
	Straight Multi-unit Abutments for CONELOG	 PXMUHAH**		20 Ncm	
	17°/30° Angled Multi-unit Abutments for CONELOG	 J5317.0501  J5317.0502		20 Ncm*	
		 J5317.0503  J5317.0504			

* with the torque wrench J5320.1030

** can be combined with J5317.0501, J5317.0502, J5317.0503, J5317.0504

All screws must be retightened with the corresponding torque after at least 5 minutes!

Materials

Titanium Grade 4		
Properties (ASTM F67)		
Chemical structure (in %)	O	≤ 0.4
	Fe	≤ 0.5
	C	≤ 0.08
	N	≤ 0.05
	H	≤ 0.015
	Ti	Rest
Mechanical properties	Tensile strength	≥ 550 MPa
	Elongation at break	≥ 12 %

Titanium alloy Ti6Al4V ELI		
Properties (ASTM F136)		
Chemical structure (in %)	Al	5.5 – 6.5
	V	3.5 – 4.5
	Fe	≤ 0.25
	C	≤ 0.08
	N	≤ 0.05
	O	≤ 0.13
	H	≤ 0.012
	Ti	Rest
Mechanical properties	Tensile strength	≥ 860 MPa
	Elongation at break	≥ 10 %

Cast-on gold alloy CONELOG® Gold-plastic abutment		
Properties		
Chemical structure (in %)	Au	60
	Pd	20
	Pt	19
	Ir	1
Physical properties	Melting range	1400 – 1490 °C
	Density	17.5 g/cm³
	E-Modul	136 GPa
	Coefficient of thermal expansion (25 – 500°C)	11.9 µm/m· °C
	Coefficient of thermal expansion (25 – 600°C)	12.2 µm/m· °C
	Color	white
Mechanical properties	Material condition	drawn
	Hardness HV5	> 215
	Tensile strength (Rm)	> 750 MPa
	0.2% Elongation limit (Rp 0.2%)	> 650 MPa
	Elongation at break	> 2 %

A	
Abutment collets	56
Abutment screw for CONELOG® Titanium bases CAD/CAM	41
Abutment screw, hex	51
Adapter for screw implants	32
Adapter ISO shaft for angled hand piece	22, 31
B	
Ball abutment analogs	45, 65
Ball abutments, male part	7, 45, 59, 65
Bite registration caps	37
Bite registration posts	37, 62
C	
CAM titanium blank	42, 58-59, 66-69
Collet for CAM blank, type IAC	42
CT-tube	15
D	
Disconnecter	7, 55
Drill extension ISO shaft, not for instruments with internal irrigation	21
Drill for CT-tube	15
Drill PROGRESSIVE-LINE Flex	18, 19, 20
Driver for ball abutment	52
Driver for Locator®	53, 70
Driver for screw implants	18, 19, 21, 22, 26, 31
E	
Esthomic® Abutments	6, 38, 39, 58, 63, 67-69
Esthomic® Abutments, Inset	39, 64, 69
Esthomic® Selection abutments	57
G	
Gold-plastic abutment	43, 58-59, 64, 67-69, 71
Guide System check-up pin PROGRESSIVE-LINE	30
Guide System dense bone drill PROGRESSIVE-LINE	27, 29
Guide System form drill PROGRESSIVE-LINE	29
Guide System form drill for Ø 3.8 mm under preparation PROGRESSIVE-LINE	29
Guide System gingiva punch PROGRESSIVE-LINE	28
Guide System guiding sleeve PROGRESSIVE-LINE	30
Guide System CONELOG® Insertion post, screw-mounted	30
Guide System pilot drill PROGRESSIVE-LINE	26, 28
Guide System pre-drill PROGRESSIVE-LINE	26, 27, 29
Guide System setting tool PROGRESSIVE-LINE	30
Guide System surgery tray CAMLOG®/CONELOG® PROGRESSIVE-LINE	28
Guide System template drill PROGRESSIVE-LINE	30
H	
Handle for CAMLOG®/CONELOG® Implant analog	55
Healing cap	34
Holding key for insertion post	19, 20, 23, 24, 27, 32
Holding sleeve for screw implants	32
I	
CONELOG® Implant analog	37, 63
Implant cover screw	34
Impression caps for impression post, closed tray	36, 62
CONELOG® Impression posts	5, 36, 62, 69

L

Lab screw for CONELOG® Titanium bases CAD/CAM	41, 68
CONELOG® Lab screw, hex	51, 68
Lamella retention insert	45
CONELOG® Locator® Abutment	48, 59, 66, 70
Locator® Abutment holder sleeve	53
Locator® Analog	48, 66
Locator® Angle measurement guide	53
Locator® Block out spacer	46, 49
Locator® Impression cap	48, 66
Locator® Instrument	53
Locator® Male processing package	49, 66
Locator® Male processing package for extended range	49, 66
Locator® Parallel post	53
Locator® Processing replacement male	49
Locator® Replacement male	49, 50
Locator® Replacement male for extended range	50
CONELOG® Locator R-Tx® Abutment	46, 59, 65, 70
Locator R-Tx® Analog	46, 47, 65
Locator R-Tx® Impression coping	46, 65
Locator R-Tx® Retention insert	47, 48, 65
Locator R-Tx® Retention insert tool	54
Locator R-Tx® Processing insert	47, 65
Locator R-Tx® Processing spacer	47, 65
Locator R-Tx® Titanium housing	47, 65
Logfit® Abutments	44, 58, 64, 67, 69-70
Logfit® Analog	44
Logfit® Impression caps	44
Logfit® Plastic copings (without rotation securing device)	44, 64

M

Manual screwdriver, hex	33, 55
Matrix CM Dalbo®-Plus	45, 65
Modeling aids for CAMLOG® Titanium bases CAD/CAM	41
Multi-unit Abutments	8, 59, 64, 70

P

Profile drill PROGRESSIVE-LINE Flex	18, 20
PROGRESSIVE-LINE Implant, Promote® plus	17, 61
Prosthetic tray	52
Prosthetic tray universal	52

R

Reworking reamer, for base for bar abutment	56
---	----

S

Scanbodies	36, 41, 66-68, 70
ScanPosts for Sirona® Scanbody	36, 41, 66-68, 70
Screwdriver Activator	52
Screwdriver, hex	18, 21-22, 26, 32-33, 54, 69-70
Selection abutment kit	57
Surgery set	
CAMLOG®/CONELOG® PROGRESSIVE-LINE	22-24
CAMLOG®/CONELOG® PROGRESSIVE-LINE Flex	18-20
CAMLOG®/CONELOG® PROGRESSIVE-LINE Guide	26-28
Surgery tray	
CAMLOG®/CONELOG® PROGRESSIVE-LINE	22-24
CAMLOG®/CONELOG® PROGRESSIVE-LINE Flex	18-20
CAMLOG®/CONELOG® PROGRESSIVE-LINE Guide	26-28

T

Telescope abutment for double crown restorations	51, 59, 66-69
Temporary abutment, crown, titanium alloy	38, 58, 63
Temporary abutment, bridge, titanium alloy	38, 59, 63
Titanium bases CAD/CAM	6, 40, 58-59, 64, 66-69
Titanium bases CAD/CAM, crown	6, 40, 58-59, 64, 66-69
Titanium bases CAD/CAM, bridge	6, 40, 58-59, 64, 66-69
Torque wrench	20, 21, 24, 52, 67, 69, 70

U

Universal abutments	43, 58-59, 64, 66-69
Universal abutments, for double crown restorations	43, 51, 59, 64, 66-69
Universal holder	56

W

Wrench adapter	18, 21
----------------	--------

X

X-Ray Planning foil 1.25:1 CONELOG® PROGRESSIVE-LINE Implants	14
X-Ray Planning foil 1.4:1 CONELOG® PROGRESSIVE-LINE Implants	14



We are
Implantology[®]

kataradental[®]
PUTS THE SMILE BACK ON[®]

 biohorizons
camlog

Index sorted by article number

05003503	Matrix CM Dalbo®-Plus	45, 65			
05003504	Lamella retention insert	45			
07000389	Screwdriver Activator	52			
08394	Locator® Abutment holder sleeve	53			
	Locator R-Tx® Retention insert				
30001-01	Ø 3.3/3.8/4.3/5.0 mm, gray	47, 65			
30002-01	Ø 3.3/3.8/4.3/5.0 mm, blue	47, 65			
30003-01	Ø 3.3/3.8/4.3/5.0 mm, pink	47, 65			
30004-01	Ø 3.3/3.8/4.3/5.0 mm, white	48, 65			
	Locator R-Tx® Processing insert				
30012-01	Ø 3.3/3.8/4.3/5.0 mm	47, 65			
	Locator R-Tx® Titanium housing				
30013-01	Ø 3.3/3.8/4.3/5.0 mm	47, 65			
	Locator R-Tx® Analog				
30014-01	Ø 3.3/3.8/4.3 mm	46, 65			
30016-01	Ø 5.0 mm	47, 65			
	Locator R-Tx® Impression coping				
30017-01	Ø 3.3/3.8/4.3/5.0 mm	46, 65			
	Locator R-Tx® Processing spacer				
30018-01	Ø 3.3/3.8/4.3/5.0 mm	47, 65			
30021-01	Locator R-Tx® Retention insert tool	54			
	CONELOG® Locator R-Tx® Abutment				
30805-01	Ø 3.3 mm, GH 1.0 mm	46, 59, 65, 70			
30805-02	Ø 3.3 mm, GH 2.0 mm	46, 59, 65, 70			
30805-03	Ø 3.3 mm, GH 3.0 mm	46, 59, 65, 70			
30805-04	Ø 3.3 mm, GH 4.0 mm	46, 59, 65, 70			
30806-01	Ø 3.8 mm, GH 1.0 mm	46, 59, 65, 70			
30806-02	Ø 3.8 mm, GH 2.0 mm	46, 59, 65, 70			
30806-03	Ø 3.8 mm, GH 3.0 mm	46, 59, 65, 70			
30806-04	Ø 3.8 mm, GH 4.0 mm	46, 59, 65, 70			
30806-05	Ø 3.8 mm, GH 5.0 mm	46, 59, 65, 70			
30807-01	Ø 4.3 mm, GH 1.0 mm	46, 59, 65, 70			
30807-02	Ø 4.3 mm, GH 2.0 mm	46, 59, 65, 70			
30807-03	Ø 4.3 mm, GH 3.0 mm	46, 59, 65, 70			
30807-04	Ø 4.3 mm, GH 4.0 mm	46, 59, 65, 70			
30807-05	Ø 4.3 mm, GH 5.0 mm	46, 59, 65, 70			
30808-01	Ø 5.0 mm, GH 1.0 mm	46, 59, 65, 70			
30808-02	Ø 5.0 mm, GH 2.0 mm	46, 59, 65, 70			
30808-03	Ø 5.0 mm, GH 3.0 mm	46, 59, 65, 70			
30808-04	Ø 5.0 mm, GH 4.0 mm	46, 59, 65, 70			
30808-05	Ø 5.0 mm, GH 5.0 mm	46, 59, 65, 70			
A2002.2000	CT-tube	15			
	Drill for CT-tube				
A2050.2600	Ø 2.6 mm	15			
A2050.2800	Ø 2.8 mm	15			
A2222.2200	CT-tube	15			
	Straight Multi-unit Abutments				
	BC2255.3320	Ø 3.3 mm, GH 2 mm	8, 59, 64, 70		
	BC2255.3330	Ø 3.3 mm, GH 3 mm	8, 59, 64, 70		
	BC2255.3340	Ø 3.3 mm, GH 4 mm	8, 59, 64, 70		
	BC2255.4320	Ø 3.8 mm, GH 2 mm	8, 59, 64, 70		
	BC2255.4330	Ø 3.8 mm, GH 3 mm	8, 59, 64, 70		
	BC2255.4340	Ø 3.8 mm, GH 4 mm	8, 59, 64, 70		
	BC2255.4320	Ø 4.8 mm, GH 2 mm	8, 59, 64, 70		
	BC2255.4330	Ø 4.8 mm, GH 3 mm	8, 59, 64, 70		
	BC2255.4340	Ø 4.8 mm, GH 4 mm	8, 59, 64, 70		
	17° Angled Multi-unit Abutments - Type A				
	BC2256.3320	Ø 3.3 mm, GH 2 mm	8, 64, 70		
	BC2256.3330	Ø 3.3 mm, GH 3 mm	8, 64, 70		
	BC2256.3340	Ø 3.3 mm, GH 4 mm	8, 64, 70		
	BC2256.4320	Ø 3.8 mm, Ø 4.3 mm, GH 2 mm	8, 64, 70		
	BC2256.4330	Ø 3.8 mm, Ø 4.3 mm, GH 3 mm	8, 64, 70		
	BC2256.4340	Ø 3.8 mm, Ø 4.3 mm, GH 4 mm	8, 64, 70		
	17° Angled Multi-unit Abutments - Type B				
	BC2257.3320	Ø 3.3 mm, GH 2 mm	8, 64, 70		
	BC2257.3330	Ø 3.3 mm, GH 3 mm	8, 64, 70		
	BC2257.3340	Ø 3.3 mm, GH 4 mm	8, 64, 70		
	BC2257.4320	Ø 3.8 mm, Ø 4.3 mm, GH 2 mm	8, 64, 70		
	BC2257.4330	Ø 3.8 mm, Ø 4.3 mm, GH 3 mm	8, 64, 70		
	BC2257.4340	Ø 3.8 mm, Ø 4.3 mm, GH 4 mm	8, 64, 70		
	30° Angled Multi-unit Abutments - Type A				
	BC2258.3320	Ø 3.3 mm, GH 2 mm	8, 64, 70		
	BC2258.3330	Ø 3.3 mm, GH 3 mm	8, 64, 70		
	BC2258.3340	Ø 3.3 mm, GH 4 mm	8, 64, 70		
	BC2258.4320	Ø 3.8 mm, Ø 4.3 mm, GH 2 mm	8, 64, 70		
	BC2258.4330	Ø 3.8 mm, Ø 4.3 mm, GH 3 mm	8, 64, 70		
	BC2258.4340	Ø 3.8 mm, Ø 4.3 mm, GH 4 mm	8, 64, 70		
	30° Angled Multi-unit Abutments - Type B				
	BC2259.3320	Ø 3.3 mm, GH 2 mm	8, 64, 70		
	BC2259.3330	Ø 3.3 mm, GH 3 mm	8, 64, 70		
	BC2259.3340	Ø 3.3 mm, GH 4 mm	8, 64, 70		
	BC2259.4320	Ø 3.8 mm, Ø 4.3 mm, GH 2 mm	8, 64, 70		
	BC2259.4330	Ø 3.8 mm, Ø 4.3 mm, GH 3 mm	8, 64, 70		
	BC2259.4340	Ø 3.8 mm, Ø 4.3 mm, GH 4 mm	8, 64, 70		
	PROGRESSIVE-LINE Implant, Promote® plus incl. screw-mounted insertion post				
	C1085.3309	Ø 3.3 mm, L 9 mm	17, 61		
	C1085.3311	Ø 3.3 mm, L 11 mm	17, 61		
	C1085.3313	Ø 3.3 mm, L 13 mm	17, 61		
	C1085.3316	Ø 3.3 mm, L 16 mm	17, 61		
	C1085.3807	Ø 3.8 mm, L 7 mm	17, 61		
	C1085.3809	Ø 3.8 mm, L 9 mm	17, 61		
	C1085.3811	Ø 3.8 mm, L 11 mm	17, 61		
	C1085.3813	Ø 3.8 mm, L 13 mm	17, 61		

C1085.3816	Ø 3.8 mm, L 16 mm	17, 61		Implant cover screw	
C1085.4307	Ø 4.3 mm, L 7 mm	17, 61	C2019.3300	Ø 3.3 mm	34
C1085.4309	Ø 4.3 mm, L 9 mm	17, 61	C2019.3800	Ø 3.8 mm	34
C1085.4311	Ø 4.3 mm, L 11 mm	17, 61	C2019.4300	Ø 4.3 mm	34
C1085.4313	Ø 4.3 mm, L 13 mm	17, 61	C2019.5000	Ø 5.0 mm	34
C1085.4316	Ø 4.3 mm, L 16 mm	17, 61		Guide System CONELOG® Insertion post	
C1085.5007	Ø 5.0 mm, L 7 mm	17, 61	C2026.3303	Ø 3.3 mm	30
C1085.5009	Ø 5.0 mm, L 9 mm	17, 61	C2026.3803	Ø 3.8 mm	30
C1085.5011	Ø 5.0 mm, L 11 mm	17, 61	C2026.4303	Ø 4.3 mm	30
C1085.5013	Ø 5.0 mm, L 13 mm	17, 61	C2026.5003	Ø 5.0 mm	30
C1085.5016	Ø 5.0 mm, L 16 mm	17, 61		Impression post, closed tray	
	PROGRESSIVE-LINE Implant, Promote® plus incl. snap-in insertion post		C2110.3300	Ø 3.3 mm	36, 62
C1086.3309	Ø 3.3 mm, L 9 mm	17, 61	C2110.3800	Ø 3.8 mm	36, 62
C1086.3311	Ø 3.3 mm, L 11 mm	17, 61	C2110.4300	Ø 4.3 mm	36, 62
C1086.3313	Ø 3.3 mm, L 13 mm	17, 61	C2110.5000	Ø 5.0 mm	36, 62
C1086.3316	Ø 3.3 mm, L 16 mm	17, 61		Impression post, open tray	
C1086.3807	Ø 3.8 mm, L 7 mm	17, 61	C2121.3300	Ø 3.3 mm	36, 62
C1086.3809	Ø 3.8 mm, L 9 mm	17, 61	C2121.3800	Ø 3.8 mm	36, 62
C1086.3811	Ø 3.8 mm, L 11 mm	17, 61	C2121.4300	Ø 4.3 mm	36, 62
C1086.3813	Ø 3.8 mm, L 13 mm	17, 61	C2121.5000	Ø 5.0 mm	36, 62
C1086.3816	Ø 3.8 mm, L 16 mm	17, 61		Bite registration posts	
C1086.4307	Ø 4.3 mm, L 7 mm	17, 61	C2140.3300	Ø 3.3 mm	37, 62
C1086.4309	Ø 4.3 mm, L 9 mm	17, 61	C2140.3800	Ø 3.8 mm	37, 62
C1086.4311	Ø 4.3 mm, L 11 mm	17, 61	C2140.4300	Ø 4.3 mm	37, 62
C1086.4313	Ø 4.3 mm, L 13 mm	17, 61	C2140.5000	Ø 5.0 mm	37, 62
C1086.4316	Ø 4.3 mm, L 16 mm	17, 61		Universal abutments	
C1086.5007	Ø 5.0 mm, L 7 mm	17, 61	C2211.3300	Ø 3.3 mm	43, 58-59, 64, 66-69
C1086.5009	Ø 5.0 mm, L 9 mm	17, 61	C2211.3800	Ø 3.8 mm	43, 51, 58-59, 64, 66-69
C1086.5011	Ø 5.0 mm, L 11 mm	17, 61	C2211.4300	Ø 4.3 mm	43, 51, 58-59, 64, 66-69
C1086.5013	Ø 5.0 mm, L 13 mm	17, 61	C2211.5000	Ø 5.0 mm	43, 51, 58-59, 64, 66-69
C1086.5016	Ø 5.0 mm, L 16 mm	17, 61		Telescope abutment for double crown restorations	
	Healing cap, wide body		C2212.3800	Ø 3.8 mm	51, 59, 66-69
C2014.3340	Ø 3.3 mm, GH 4.0 mm	34	C2212.4300	Ø 4.3 mm	51, 59, 66-69
C2014.3840	Ø 3.8 mm, GH 4.0 mm	34	C2212.5000	Ø 5.0 mm	51, 59, 66-69
C2014.3860	Ø 3.8 mm, GH 6.0 mm	34		Esthomic® Abutments, straight	
C2014.4340	Ø 4.3 mm, GH 4.0 mm	34	C2226.3815	Ø 3.8 mm, GH 1.5 – 2.5 mm	6, 38, 58, 63
C2014.4360	Ø 4.3 mm, GH 6.0 mm	34	C2226.3830	Ø 3.8 mm, GH 3.0 – 4.5 mm	6, 38, 58, 63
C2014.5040	Ø 5.0 mm, GH 4.0 mm	34	C2226.4315	Ø 4.3 mm, GH 1.5 – 2.5 mm	6, 38, 58, 63
C2014.5060	Ø 5.0 mm, GH 6.0 mm	34	C2226.4330	Ø 4.3 mm, GH 3.0 – 4.5 mm	6, 38, 58, 63
	Healing cap, cylindrical		C2226.5015	Ø 5.0 mm, GH 1.5 – 2.5 mm	6, 38, 58, 63
C2015.3320	Ø 3.3 mm, GH 2.0 mm	34	C2226.5030	Ø 5.0 mm, GH 3.0 – 4.5 mm	6, 38, 58, 63
C2015.3340	Ø 3.3 mm, GH 4.0 mm	34		Esthomic® Abutments, 15° angled, type A	
C2015.3820	Ø 3.8 mm, GH 2.0 mm	34	C2227.3815	Ø 3.8 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63
C2015.3840	Ø 3.8 mm, GH 4.0 mm	34	C2227.3830	Ø 3.8 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63
C2015.3860	Ø 3.8 mm, GH 6.0 mm	34	C2227.4315	Ø 4.3 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63
C2015.4320	Ø 4.3 mm, GH 2.0 mm	34	C2227.4330	Ø 4.3 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63
C2015.4340	Ø 4.3 mm, GH 4.0 mm	34	C2227.5015	Ø 5.0 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63
C2015.4360	Ø 4.3 mm, GH 6.0 mm	34	C2227.5030	Ø 5.0 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63
C2015.5020	Ø 5.0 mm, GH 2.0 mm	34			
C2015.5040	Ø 5.0 mm, GH 4.0 mm	34			
C2015.5060	Ø 5.0 mm, GH 6.0 mm	34			

	Esthomic® Abutments, 15° angled, type B		
C2228.3815	Ø 3.8 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2228.3830	Ø 3.8 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	
C2228.4315	Ø 4.3 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2228.4330	Ø 4.3 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	
C2228.5015	Ø 5.0 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2228.5030	Ø 5.0 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	

	Esthomic® Abutments, 20° angled, type A		
C2231.3815	Ø 3.8 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2231.3830	Ø 3.8 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	
C2231.4315	Ø 4.3 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2231.4330	Ø 4.3 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	
C2231.5015	Ø 5.0 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2231.5030	Ø 5.0 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	

	Esthomic® Abutments, 20° angled, type B		
C2232.3815	Ø 3.8 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2232.3830	Ø 3.8 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	
C2232.4315	Ø 4.3 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2232.4330	Ø 4.3 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	
C2232.5015	Ø 5.0 mm, GH 1.5 – 2.5 mm	6, 39, 58, 63	
C2232.5030	Ø 5.0 mm, GH 3.0 – 4.5 mm	6, 39, 58, 63	

	Esthomic® Abutments, Inset		
C2235.3320	Ø 3.3 mm, GH 2.0 – 3.3 mm	6, 39, 58, 64	
C2235.3820	Ø 3.8 mm, GH 2.0 – 3.3 mm	6, 39, 58, 64	
C2235.4320	Ø 4.3 mm, GH 2.0 – 3.3 mm	6, 39, 58, 64	
C2235.5020	Ø 5.0 mm, GH 2.0 – 3.3 mm	6, 39, 58, 64	

	Temporary abutment, crown		
C2239.3300	Ø 3.3 mm	6, 38, 58, 63, 67-69	
C2239.3800	Ø 3.8 mm	6, 38, 58, 63, 67-69	
C2239.4300	Ø 4.3 mm	6, 38, 58, 63, 67-69	
C2239.5000	Ø 5.0 mm	6, 38, 58, 63, 67-69	

	Modeling aids for CONELOG® Titanium bases CAD/CAM		
C2242.3302	Ø 3.3 mm	41	
C2242.3802	Ø 3.8 mm	41	
C2242.4302	Ø 4.3 mm	41	
C2242.5002	Ø 5.0 mm	41	

	Titanium bases CAD/CAM, crown		
C2242.3308	Ø 3.3 mm, GH 0.8 mm	40, 58-59, 64, 66-69	
C2242.3320	Ø 3.3 mm, GH 2.0 mm	40, 58-59, 64, 66-69	
C2242.3808	Ø 3.8 mm, GH 0.8 mm	40, 58-59, 64, 66-69	
C2242.5008	Ø 3.8 mm, GH 0.8 mm	40, 58-59, 64, 66-69	

	Titanium bases CAD/CAM, crown		
C2242.3820	Ø 3.8 mm, GH 2.0 mm	40, 58-59, 64, 66-69	
C2242.4308	Ø 4.3 mm, GH 0.8 mm	40, 58-59, 64, 66-69	
C2242.4320	Ø 4.3 mm, GH 2.0 mm	40, 58-59, 64, 66-69	
C2242.5008	Ø 5.0 mm, GH 0.8 mm	40, 58-59, 64, 66-69	
C2242.5020	Ø 5.0 mm, GH 2.0 mm	40, 58-59, 64, 66-69	

	Gold-plastic abutment		
C2246.3300	Ø 3.3 mm	43, 58-59, 64, 67-69, 71	
C2246.3800	Ø 3.8 mm	43, 58-59, 64, 67-69, 71	
C2246.4300	Ø 4.3 mm	43, 58-59, 64, 67-69, 71	
C2246.5000	Ø 5.0 mm	43, 58-59, 64, 67-69, 71	

	Ball abutments, male part		
C2249.3315	Ø 3.3 mm, GH 1.5 mm	7, 45, 59, 65	
C2249.3330	Ø 3.3 mm, GH 3.0 mm	7, 45, 59, 65	
C2249.3815	Ø 3.8 mm, GH 1.5 mm	7, 45, 59, 65	
C2249.3830	Ø 3.8 mm, GH 3.0 mm	7, 45, 59, 65	
C2249.3845	Ø 3.8 mm, GH 4.5 mm	7, 45, 59, 65	
C2249.4315	Ø 4.3 mm, GH 1.5 mm	7, 45, 59, 65	
C2249.4330	Ø 4.3 mm, GH 3.0 mm	7, 45, 59, 65	
C2249.4345	Ø 4.3 mm, GH 4.5 mm	7, 45, 59, 65	
C2249.5015	Ø 5.0 mm, GH 1.5 mm	7, 45, 59, 65	
C2249.5030	Ø 5.0 mm, GH 3.0 mm	7, 45, 59, 65	
C2249.5045	Ø 5.0 mm, GH 4.5 mm	7, 45, 59, 65	

	CONELOG® Locator® Abutments		
C2253.3310	Ø 3.3 mm, GH 1.0 mm	48, 59, 66, 70	
C2253.3320	Ø 3.3 mm, GH 2.0 mm	48, 59, 66, 70	
C2253.3330	Ø 3.3 mm, GH 3.0 mm	48, 59, 66, 70	
C2253.3340	Ø 3.3 mm, GH 4.0 mm	48, 59, 66, 70	
C2253.3810	Ø 3.8 mm, GH 1.0 mm	48, 59, 66, 70	
C2253.3820	Ø 3.8 mm, GH 2.0 mm	48, 59, 66, 70	
C2253.3830	Ø 3.8 mm, GH 3.0 mm	48, 59, 66, 70	
C2253.3840	Ø 3.8 mm, GH 4.0 mm	48, 59, 66, 70	
C2253.3850	Ø 3.8 mm, GH 5.0 mm	48, 59, 66, 70	
C2253.4310	Ø 4.3 mm, GH 1.0 mm	48, 59, 66, 70	
C2253.4320	Ø 4.3 mm, GH 2.0 mm	48, 59, 66, 70	
C2253.4330	Ø 4.3 mm, GH 3.0 mm	48, 59, 66, 70	
C2253.4340	Ø 4.3 mm, GH 4.0 mm	48, 59, 66, 70	
C2253.4350	Ø 4.3 mm, GH 5.0 mm	48, 59, 66, 70	
C2253.5010	Ø 5.0 mm, GH 1.0 mm	48, 59, 66, 70	
C2253.5020	Ø 5.0 mm, GH 2.0 mm	48, 59, 66, 70	
C2253.5030	Ø 5.0 mm, GH 3.0 mm	48, 59, 66, 70	
C2253.5040	Ø 5.0 mm, GH 4.0 mm	48, 59, 66, 70	
C2253.5050	Ø 5.0 mm, GH 5.0 mm	48, 59, 66, 70	

	Temporary abutment, bridge		
C2339.3300	Ø 3.3 mm	6, 38, 59, 63, 67-69	
C2339.3800	Ø 3.8 mm	6, 38, 59, 63, 67-69	
C2339.4300	Ø 4.3 mm	6, 38, 59, 63, 67-69	
C2339.5000	Ø 5.0 mm	6, 38, 59, 63, 67-69	

	Titanium bases CAD/CAM, bridge		
C2342.3308	Ø 3.3 mm, GH 0.8 mm	40, 58-59, 64, 66	
C2342.3320	Ø 3.3 mm, GH 2.0 mm	40, 58-59, 64, 66	
C2342.3808	Ø 3.8 mm, GH 0.8 mm	40, 58-59, 64, 66	
C2342.3820	Ø 3.8 mm, GH 2.0 mm	40, 58-59, 64, 66	
C2342.4308	Ø 4.3 mm, GH 0.8 mm	40, 58-59, 64, 66	
C2342.4320	Ø 4.3 mm, GH 2.0 mm	40, 58-59, 64, 66	
C2342.5008	Ø 5.0 mm, GH 0.8 mm	40, 58-59, 64, 66	
C2342.5020	Ø 5.0 mm, GH 2.0 mm	40, 58-59, 64, 66	

	CAM titanium blank, type IAC		
C2411.3313	Ø 3.3 mm	42, 58-59, 66-69	
C2411.4313	Ø 3.8/4.3 mm	42, 58-59, 66-69	
C2411.5013	Ø 5.0 mm	42, 58-59, 66-69	

CAM titanium blank, type ME			Lab screw for CONELOG®		
C2421.3320	Ø 3.3 mm	42, 58-59, 66-69	Titanium bases CAD/CAM		
C2421.3820	Ø 3.8 mm	42, 58-59, 66-69	C4016.1601	Ø 3.3/3.8/4.3 mm	41, 68
C2421.4320	Ø 4.3 mm	42, 58-59, 66-69	C4016.2001	Ø 5.0 mm	41, 68
C2421.5020	Ø 5.0 mm	42, 58-59, 66-69	Disconnecter		
Logfit® Abutments			C5300.1601	Ø 3.3/3.8/4.3 mm, short	55
C2550.3810	Ø 3.8 mm, GH 1.0 mm	44, 58, 64, 67, 69	C5300.1603	Ø 3.3/3.8/4.3 mm, long	55
C2550.3825	Ø 3.8 mm, GH 2.5 mm	44, 58, 64, 67, 69	C5300.2001	Ø 5.0 mm, short	55
C2550.4310	Ø 4.3 mm, GH 1.0 mm	44, 58, 64, 67, 69	C5300.2003	Ø 5.0 mm, long	55
C2550.4325	Ø 4.3 mm, GH 2.5 mm	44, 58, 64, 67, 69	CONELOG® PROGRESSIVE-LINE Implants		
C2550.5010	Ø 5.0 mm, GH 1.0 mm	44, 58, 64, 67, 69	C5300.9014	X-Ray Planning foil 1.25:1	14
C2550.5025	Ø 5.0 mm, GH 2.5 mm	44, 58, 64, 67, 69	C5300.9015	X-Ray Planning foil 1.4:1	14
Scanbodies			Adapter for screw implants		
C2600.3310	Ø 3.3 mm	36, 41, 66-68, 70	C5302.3310	Ø 3.3 mm, long	32
C2600.4310	Ø 3.8/4.3 mm	36, 41, 66-68, 70	C5302.3311	Ø 3.3 mm, short	32
C2600.5010	Ø 5.0 mm	36, 41, 66-68, 70	C5302.4310	Ø 3.8/4.3 mm, long	32
ScanPosts for Sirona® Scanbody			C5302.4311	Ø 3.8/4.3 mm, short	32
C2620.3306	Ø 3.3 mm	36, 41, 66-68, 70	C5302.5011	Ø 5.0 mm, short	32
C2620.3806	Ø 3.8 mm	36, 41, 66-68, 70	C8011.1000 Selection abutment kit		
C2620.4306	Ø 4.3 mm	36, 41, 66-68, 70			57
C2620.5006	Ø 5.0 mm	36, 41, 66-68, 70	Impression caps for impression post, closed tray		
Ball abutment analogs			J2111.3300	Ø 3.3 mm	36, 62
C3015.3300	Ø 3.3/3.8/4.3 mm	45, 65	J2111.3800	Ø 3.8 mm	36, 62
C3015.5000	Ø 5.0 mm	45, 65	J2111.4300	Ø 4.3 mm	36, 62
Implant analog			J2111.5000	Ø 5.0 mm	36, 62
C3025.3300	Ø 3.3 mm	37, 63	Bite registration caps		
C3025.3800	Ø 3.8 mm	37, 63	J2112.3300	Ø 3.3 mm	37
C3025.4300	Ø 4.3 mm	37, 63	J2112.3800	Ø 3.8 mm	37
C3025.5000	Ø 5.0 mm	37, 63	J2112.4300	Ø 4.3 mm	37
C3709.0010	Universal holder	56	J2112.5000	Ø 5.0 mm	37
Abutment collets			J2253.0001	Driver for Locator®	53, 70
C3709.3300	Ø 3.3 mm	56	J2253.0002	Locator® Instrument	53
C3709.3800	Ø 3.8 mm	56	J2253.0003	Locator® Angle measurement guide	53
C3709.4300	Ø 4.3 mm	56	J2253.0004	Locator® Parallel post	53
C3709.5000	Ø 5.0 mm	56	J2253.0102	Locator® Male processing package	49, 66
Collet for CAM blank, type IAC			J2253.0112	Locator® Male processing package for extended range	49, 66
C3720.3300	Ø 3.3 mm	42	J2253.0200	Locator® Impression cap	48, 66
C3720.4300	Ø 3.8/4.3 mm	42	J2253.0340	Locator® Analog	48, 66
C3720.5000	Ø 5.0 mm	42	J2253.0401	Locator® Block out spacer	49
Abutment screw, hex			J2253.0402	Locator® Processing replacement male	49
C4005.1601	Ø 3.3/3.8/4.3 mm	51, 67	Abutment screw for CONELOG®		
C4005.2001	Ø 5.0 mm	51, 67	Titanium bases CAD/CAM		
C4006.1601	Ø 3.3/3.8/4.3 mm	51, 68	C4015.1601	Ø 3.3/3.8/4.3 mm	41, 67
C4006.2001	Ø 5.0 mm	51, 68	C4015.2001	Ø 5.0 mm	41, 67

J2253.1002	Locator® Replacement male blue	50	J5002.0006	Drill extension ISO shaft not for instruments with internal irrigation	19, 21, 22
J2253.1003	pink	50			
J2253.1005	clear	49	J5002.0011	Adapter ISO shaft	22, 31
	Locator® Replacement male for extended range		J5002.0013	Wrench adapter	18
J2253.2000	Ø 3.8/4.3/5.0 mm, gray	50		Guide System gingiva punch	
J2253.2002	Ø 3.8/4.3/5.0 mm, red	50	J5041.3304	Ø 3.3 mm, PROGRESSIVE-LINE	26, 28
J2253.2003	Ø 3.8/4.3/5.0 mm, orange	50	J5041.3804	Ø 3.8 mm, PROGRESSIVE-LINE	26, 28
J2253.2004	Ø 3.8/4.3/5.0 mm, green	50	J5041.4304	Ø 4.3 mm, PROGRESSIVE-LINE	26, 28
	Logfit® Impression caps		J5041.5004	Ø 5.0 mm, PROGRESSIVE-LINE	26, 28
J2551.4300	Ø 3.8/4.3 mm	44		Guide System pilot drill PROGRESSIVE-LINE	
J2551.6000	Ø 5.0 mm	44	J5074.3305	Ø 3.3 mm, L 5 mm	26, 28
	Logfit® Analog		J5074.3309	Ø 3.3 mm, L 9 mm	26, 28
J2552.4300	Ø 3.8/4.3 mm	44	J5074.3311	Ø 3.3 mm, L 11 mm	26, 28
J2552.6000	Ø 5.0 mm	44	J5074.3313	Ø 3.3 mm, L 13 mm	26, 28
	Logfit® Plastic copings		J5074.3316	Ø 3.3 mm, L 16 mm	26, 28
J2553.4301	Ø 3.8/4.3 mm, for bridges	44, 64	J5074.4305	Ø 3.8/4.3 mm, L 5 mm	26, 28
J2553.4302	Ø 3.8/4.3 mm, for crowns	44, 64	J5074.4307	Ø 3.8/4.3 mm, L 7 mm	26, 28
J2553.6001	Ø 5.0 mm, for bridges	44, 64	J5074.4309	Ø 3.8/4.3 mm, L 9 mm	26, 28
J2553.6002	Ø 5.0 mm, for crowns	44, 64	J5074.4311	Ø 3.8/4.3 mm, L 11 mm	26, 28
	Handle for CAMLOG®/CONELOG® Implant analog		J5074.4313	Ø 3.8/4.3 mm, L 13 mm	26, 28
J3025.0010	Ø 3.3/3.8/4.3 mm	55	J5074.4316	Ø 3.8/4.3 mm, L 16 mm	26, 28
J3025.0015	Ø 5.0 mm	55	J5074.5005	Ø 5.0 mm, L 5 mm	26, 28
	Universal holder	56	J5074.5007	Ø 5.0 mm, L 7 mm	26, 28
	Reworking reamer, for base for bar abutment		J5074.5009	Ø 5.0 mm, L 9 mm	26, 28
J3711.0010	Ø 3.3/3.8/4.3 mm, plane surface	56	J5074.5011	Ø 5.0 mm, L 11 mm	26, 28
J3711.0015	Ø 5.0 mm, plane surface	56	J5074.5013	Ø 5.0 mm, L 13 mm	26, 28
J3711.0020	Ø 3.3/3.8/4.3 mm, screw seat	56	J5074.5016	Ø 5.0 mm, L 16 mm	26, 28
J3711.0025	Ø 5.0 mm, screw seat	56		Guide System pre-drill PROGRESSIVE-LINE	
	Guide System setting tool PROGRESSIVE-LINE		J5076.3305	Ø 3.3 mm	26, 29
J3717.3300	Ø 3.3 mm	30	J5076.3805	Ø 3.8 mm	27, 29
J3717.4300	Ø 3.8/4.3 mm	30	J5076.4305	Ø 4.3 mm	27, 29
J3717.5000	Ø 5.0 mm	30	J5076.5005	Ø 5.0 mm	27, 29
	Guide System template drill PROGRESSIVE-LINE			Guide System form drill PROGRESSIVE-LINE	
J3753.3300	Ø 3.3 mm	30	J5076.3309	Ø 3.3 mm, L 9 mm	26, 29
J3753.4300	Ø 3.8/4.3 mm	30	J5076.3311	Ø 3.3 mm, L 11 mm	26, 29
J3753.5000	Ø 5.0 mm	30	J5076.3313	Ø 3.3 mm, L 13 mm	26, 29
	Guide System guiding sleeve PROGRESSIVE-LINE		J5076.3316	Ø 3.3 mm, L 16 mm	26, 29
J3754.3301	Ø 3.3 mm	30	J5076.3807	Ø 3.8 mm, L 7 mm	27, 29
J3754.3801	Ø 3.8 mm	30	J5076.3809	Ø 3.8 mm, L 9 mm	27, 29
J3754.4301	Ø 4.3 mm	30	J5076.3811	Ø 3.8 mm, L 11 mm	27, 29
J3754.5001	Ø 5.0 mm	30	J5076.3813	Ø 3.8 mm, L 13 mm	27, 29
			J5076.3816	Ø 3.8 mm, L 16 mm	27, 29
			J5076.4307	Ø 4.3 mm, L 7 mm	27, 29
			J5076.4309	Ø 4.3 mm, L 9 mm	27, 29
			J5076.4311	Ø 4.3 mm, L 11 mm	27, 29
			J5076.4313	Ø 4.3 mm, L 13 mm	27, 29
			J5076.4316	Ø 4.3 mm, L 16 mm	27, 29
			J5076.5007	Ø 5.0 mm, L 7 mm	27, 29
			J5076.5009	Ø 5.0 mm, L 9 mm	27, 29
			J5076.5011	Ø 5.0 mm, L 11 mm	27, 29
			J5076.5013	Ø 5.0 mm, L 13 mm	27, 29

J5076.5016	Ø 5.0 mm, L 16 mm	27, 29	J5300.0035	long (with hexagon at the shaft)	31
	Guide System form drill for Ø 3.8 mm		J5300.0036	short (without hexagon	
	under preparation PROGRESSIVE-LINE			at the shaft)	19, 21, 22, 26, 31
J5077.3309	Ø 3.3 mm, L 9 mm	27, 29	J5300.0037	long (without hexagon	
J5077.3311	Ø 3.3 mm, L 11 mm	27, 29		at the shaft)	22, 26, 31
J5077.3313	Ø 3.3 mm, L 13 mm	27, 29		Surgery set CAMLOG®/CONELOG®	
J5077.3316	Ø 3.3 mm, L 16 mm	27, 29	J5300.0065	PROGRESSIVE-LINE	24
	Guide System dense bone drill		J5300.0071	PROGRESSIVE-LINE Flex	20
	PROGRESSIVE-LINE			Surgery tray (without content)	
J5078.3309	Ø 3.3 mm, L 9 mm	27, 29		CAMLOG®/CONELOG®	
J5078.3311	Ø 3.3 mm, L 11 mm	27, 29	J5300.8917	PROGRESSIVE-LINE	24
J5078.3313	Ø 3.3 mm, L 13 mm	27, 29	J5300.8920	PROGRESSIVE-LINE Flex	20
J5078.3316	Ø 3.3 mm, L 16 mm	27, 29		Guide System surgery tray	
J5078.3807	Ø 3.8 mm, L 7 mm	27, 29		CAMLOG®/CONELOG® (without content)	
J5078.3809	Ø 3.8 mm, L 9 mm	27, 29	J5300.8919	PROGRESSIVE-LINE	28
J5078.3811	Ø 3.8 mm, L 11 mm	27, 29		Guide System check-up pin	
J5078.3813	Ø 3.8 mm, L 13 mm	27, 29	J5301.3310	Ø 3.3 mm, PROGRESSIVE-LINE	30
J5078.3816	Ø 3.8 mm, L 16 mm	27, 29	J5301.4310	Ø 3.8/4.3 mm, PROGRESSIVE-LINE	30
J5078.4307	Ø 4.3 mm, L 7 mm	27, 29	J5301.5010	Ø 5.0 mm, PROGRESSIVE-LINE	30
J5078.4309	Ø 4.3 mm, L 9 mm	27, 29			
J5078.4311	Ø 4.3 mm, L 11 mm	27, 29	J5302.0010	Holding key for insertion	
J5078.4313	Ø 4.3 mm, L 13 mm	27, 29		post	19, 23, 27, 32
J5078.4316	Ø 4.3 mm, L 16 mm	27, 29		Holding sleeve for screw implants	
	Guide System dense bone drill		J5302.3300	Ø 3.3 mm	32
	PROGRESSIVE-LINE		J5302.3800	Ø 3.8 mm	32
J5078.5007	Ø 5.0 mm, L 7 mm	27, 29	J5302.4300	Ø 4.3 mm	32
J5078.5009	Ø 5.0 mm, L 9 mm	27, 29	J5302.5000	Ø 5.0 mm	32
J5078.5011	Ø 5.0 mm, L 11 mm	27, 29			
J5078.5013	Ø 5.0 mm, L 13 mm	27, 29		Screwdriver, hex short,	
J5078.5016	Ø 5.0 mm, L 16 mm	27, 29	J5317.0501	manual/wrench	18, 21, 22, 26, 32, 54, 69-70
	Drill PROGRESSIVE-LINE Flex		J5317.0502	long, manual/wrench	22, 26, 32, 54, 69-70
J5079.3300	Ø 3.3 mm	18, 20	J5317.0503	long, ISO shaft	22, 26, 33, 54, 69-70
J5079.3800	Ø 3.8 mm	18, 20	J5317.0504	short, ISO shaft	19, 21, 33, 54, 69-70
J5079.4300	Ø 4.3 mm	19, 20	J5317.0510	extra short, manual/wrench	32, 54, 69
J5079.5000	Ø 5.0 mm	19, 20			
	Profile drill PROGRESSIVE-LINE Flex		J5317.0511	Manual screwdriver, hex	33, 55
J5080.3300	Ø 3.3 mm	18, 20	J5320.1030	Torque wrench	19, 21, 23, 27, 52
J5080.3800	Ø 3.8 mm	18, 20			
	Profile drill PROGRESSIVE-LINE Flex		J5330.8500	Prosthetic tray	52
J5080.4300	Ø 4.3 mm	18, 20	J5330.8700	Prosthetic tray universal	52
J5080.5000	Ø 5.0 mm	18, 20			
	Driver for ball abutment,				
J5300.0011	manual/wrench	52, 70			
	Driver for screw implants				
J5300.0031	extra short, manual/wrench	22, 26, 31			
J5300.0032	short, manual/wrench	22, 26, 31			
J5300.0033	long, manual/wrench	18, 21, 22, 26, 31			
	with ISO-shaft for angled hand piece				
J5300.0034	short (with hexagon at the shaft)	31			

Further documentation

Further information on the CONELOG® Products can be found in the following documents:

- CONELOG® Product catalog
- CONELOG® Working instructions
- CONELOG® Instruction for use
- Preparation instructions
- Camlog literature overview
- Camlog and science

The documents are available from the local Camlog representative.

See also:

<https://ifu.camlog.com>

www.camlog.com

References

- [1] Conserva E. Initial stability after placement of a new buttress-threaded implant. A case series study. implants. 2019(3): 24-28.
- [2] Rupp J. One-year clinical experience with Progressive-Line implants. EDI journal. 2020(4): 54-63.
- [3] Semper-Hogg W, Kraft S, Stiller S, Mehrhof J, Nelson K. Analytical and experimental position stability of the abutment in different dental implant systems with a conical implant-abutment connection. Clin Oral Investig. 2013;17(3): 1017-23.
- [4] Semper Hogg W, Zulauf K, Mehrhof J, Nelson K. The influence of torque tightening on the position stability of the abutment in conical implant-abutment connections. Int J Prosthodont. 2015;28(5):538-41.

Trademarks and copyright

Protected trade names (trademarks) are not always specially indicated. The absence of such an indication does not mean that this name is NOT a trademark. The document including all its parts is protected by copyright. You may download the content regarding the intended use, but changes to or reproduction of the content are not permitted. Any exploitation beyond the narrow limits of the copyright act is not permitted without prior written approval of CAMLOG Biotechnologies GmbH and is subject to legal sanctions.

CAMLOG®, CONELOG®, Esthomic®, Logfit® and Promote® are registered trademarks of CAMLOG Biotechnologies GmbH. LOCATOR®, LOCATOR R-Tx®, R-Tx, ZEST, and Zest Dental Solutions, Color and Shape of Retention Inserts are registered trademarks of ZEST IP Holdings, LLC.

BioHorizons® is a registered trademark of BioHorizons.

Any other mentioned third party trademarks are the property of the respective trademark owner.

Manufacturer

Multi-unit abutments are manufactured by BioHorizons.

Locator® and Locator R-Tx® are manufactured by Zest Anchors LLC.

CAMLOG® and CONELOG® products are manufactured by:

ALTATEC GmbH | Maybacherstr. 5 | 71299 Wimsheim | Germany

Implant-to-Restoration

LIFETIME WARRANTY



**FOR THE 1ST TIME
EVER IN INDIA!**

**CAMLOG® & KATARA DENTAL
OFFER AN IMPLANT TO RESTORATION
LIFETIME WARRANTY***

This Lifetime Warranty covers the implant(s), abutment(s) and the restoration(s) when fabricated on Camlog implants, and abutments, and restorations created by Katara Dental Laboratories. This Warranty is between your dental practice and Katara Dental/Camlog.

Our goal is to provide dentists with the finest technical assistance to create the most predictable implant restorations possible and help to ensure long term case success for your patients.

*Applicable to restorations recreated due to implant failure. Warranty does not include alloy charges for precious and semi-precious restorations. Restoration fabrication cost included.

As part of the Authentic Connection campaign, CONELOG® PROGRESSIVE-LINE Implants that are restored with non-CONELOG® abutment connections will no longer be part of the lifetime warranty or Implant-to-Restoration Lifetime warranty program. We encourage you to keep record of the LOT numbers and Item Codes of all Implants and abutments to ensure a seamless warranty claim experience. Non-CONELOG® abutment connections include all types of castables and lab manufactured connections.

kataradental®
PUTS THE SMILE BACK ON®

Authorised Distributor for India



Distributor India

Katara Dental Headquarters | Apurva Complex, 56 | Ganeshkhind Road | Aundh | Pune 411 007 | India
Phone +91 960 7992951 | www.kataradental.com

Headquarters

CAMLOG Biotechnologies GmbH | Margarethenstr. 38 | 4053 Basel | Switzerland
Phone +41 61 565 41 00 | Fax +41 61 565 41 01 | info@camlog.com | www.camlog.com

Inspiring excellence in oral reconstruction

